


## Collar INTEGRAL with 2 sockets TYTON

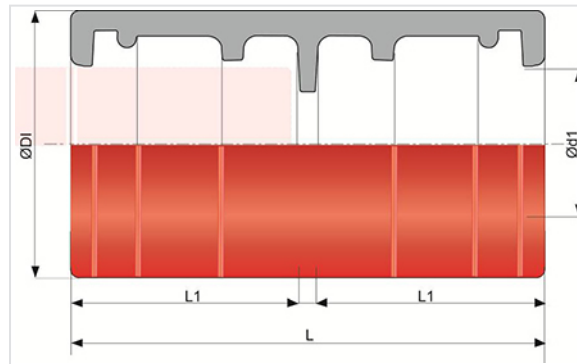

DN (mm)	PFA (bar)	ØDI (mm)	Ød1 (mm)	L1 (mm)	L (mm)	Mass (kg)	References
150	40	207	170	75	158	8.00	107639
200	40	262	222	80	168	11.50	107604
250	38	315	274	86	180	14.50	107603
300	35	371	326	95	200	20.00	107605
400	30	479	429	100	210	32.00	TJB40ML
500	28	587	532	107	224	45.00	TJB50ML
600	26	695	635	120	250	56.00	TJB60ML
700	29	808	738	145	300	97.00	TJB70ML
800	28	917	842	155	320	128.00	TJB80ML

### Field of use:

- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- For networks with rising main under pressure
- For effluents between pH1 and pH13

### Main characteristics:

- External and internal coating: red epoxy powder 250µm (PECR)
- Type of joint: Tyton
- Standard Gasket in Nitrile
- EN 598 / CE Marking
- Declaration of performances



# INTEGRAL WASTE AND RAINWATER DN 150 - 800

03/06/2026  
SILMN22TYT009

---

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*

