


Collar IZIFIT

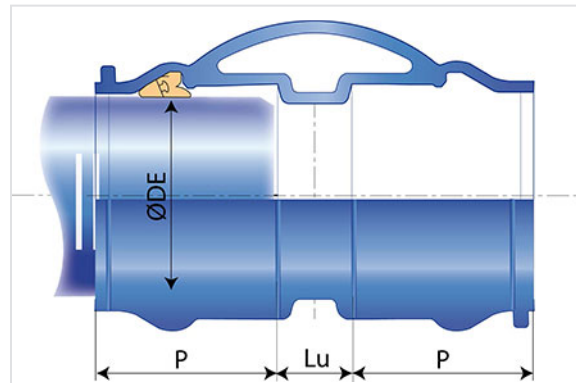

DN/OD (mm)	ØDE (mm)	P (mm)	Lu (mm)	Mass (kg)	References
90	90	92.5	40	4.00	KTL90MN
90	90	92.5	40	4.00	KVL90MN
110	110	99	40	4.90	KTM11MN
125	125	104	40	5.50	KTM12MN


Field of use:

- For drinking water supply networks and connection with plastics piping systems for water transport under pressure in PVC-U, PE or PVC-BO
- All the constituent materials have "Attestation de Conformité Sanitaire" in France (ACS), WRAS and DWI agreements in UK, DVGW agreement in Germany


Main characteristics:

- Internal and external coating: blue epoxy powder (thickness 250 microns) according to EN 14901-1
- Joints in EPDM according to EN 681-1
- For transport and storage, the joints are protected by plugs
- Conformity to EN12842: ductile iron fittings for PVC-U or PE piping systems
- Conformity to ISO 16631-2016: ductile iron fittings for PVC-U or PE piping systems
- Conformity to NF T 54-948: plastics piping systems for water transport under pressure - pipes made of biaxial oriented poly(vinyl chloride) (PVC-BO)

Linked products

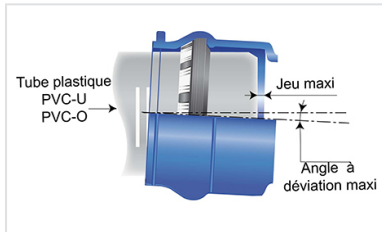

IZIFIT Joint for plastics piping systems

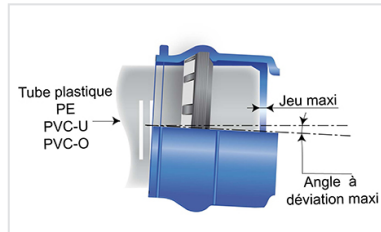

IZIFIT anchored Vi Joint for plastics piping systems

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.