


## Collar IZIFIT-K

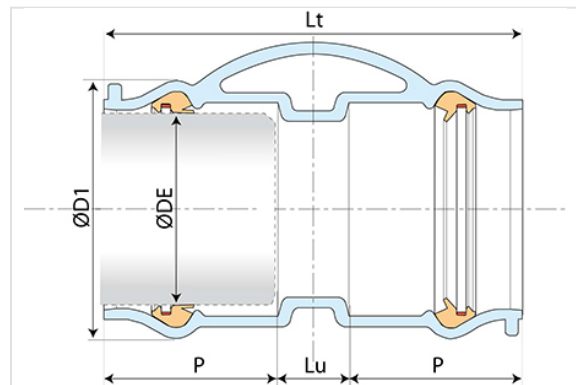

DN/OD (mm)	ØDE (mm)	ØD1 (mm)	P (mm)	Lu (mm)	Lt (mm)	Mass (kg)	References
63	63	96	83	40	206	2.56	KZL63MN
140	140	177	108	40	256	6.61	KZM14MN
160	160	199	114	50	278	8.02	KZM16MN
200	200	243	127	60	314	10.93	KZM20MN


### Field of use:

- Jointing of PVC-U pipes
- For potable water networks


### Main characteristics:

- EN 12842
- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- IZIFIT-K fittings are supplied with pre-fitted gaskets protected by caps
- Elastomer quality : EPDM (EN 681-1)

## Linked products

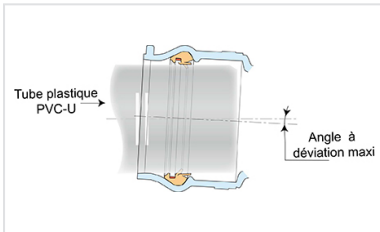

IZIFIT-K Joint for plastics piping systems

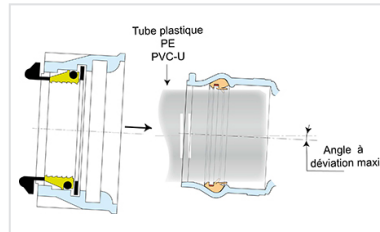

IZIFIT-K anchored Vi Joint for plastics piping systems

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*