


TELECOM Duct cover T-MAX-i C250 - Cover 633 x 495

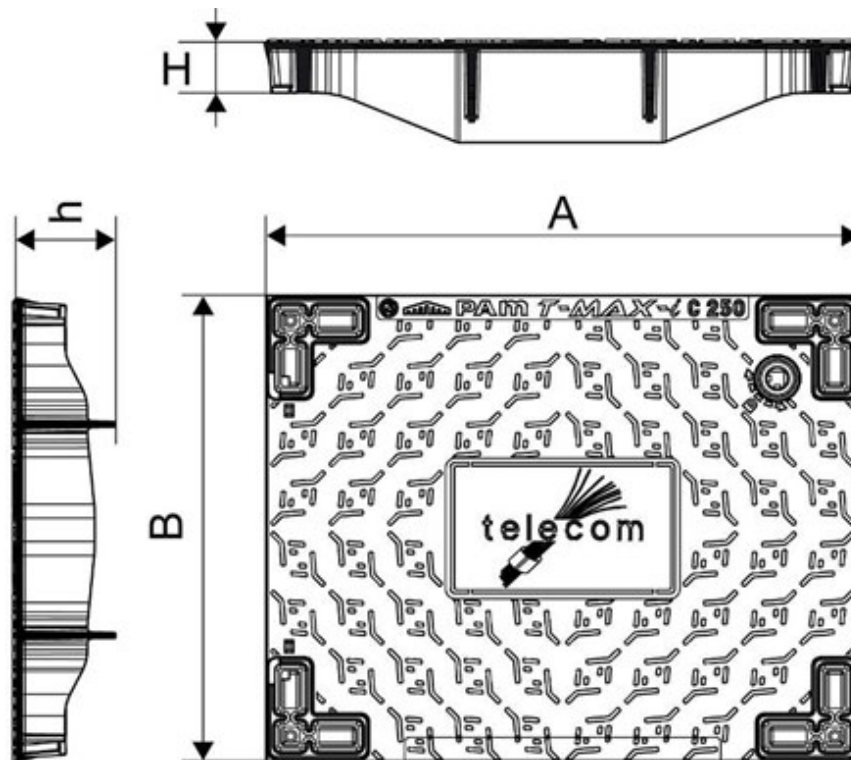

AxB (mm)	H (mm)	h (mm)	Cover mass (kg)	Packaging	References
633x495	54	107	25.7	15	DCL1TMIZTEL-T
633x495	54	107	25.7	15	DCL1TMIZ-T

Material and coating:

- Cover in Ductile Iron EN GJS 400-15: water base

Field of application:

- C250 class (Group 3) according to standard EN 124-2, intended for the circulated pavements and similar locations subjected to the passage of vehicles.
- Conforms to NF P98-050-2 for underground structures for the accommodation of dry networks - Part 2: Closing devices



Main characteristics:

- Covers with soundproofing pads
- Usable like cover of replacement on galvanized steel frame.

Conformity:

Saint-Gobain PAM attests that:

- the above mentioned products are manufactured in compliance with specifications, materials & characteristics as per EN124-2 : 2015 standard
- the features and performances of the above mentioned products are controlled and comply with requirements of EN124-1 : 2015 standard

The PAM brand affixed on these related products materialises this attestation of conformity.

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.