


## Double Spigot piece ALPINAL + Weld bead Ve at each spigot-end

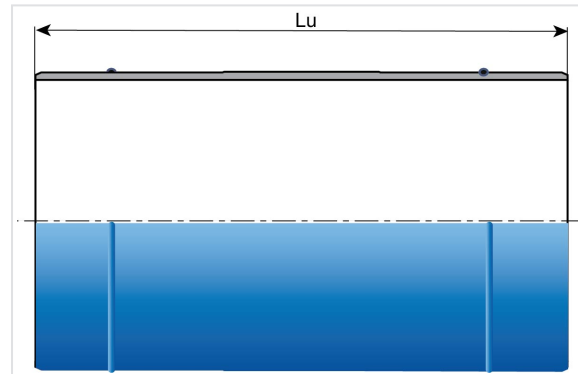

DN (mm)	Lu (mm)	Mass (kg)	References
150	800	24.30	AUB15MV0STT
200	800	38.70	AUB20MV0STT
250	800	56.70	AUB25MV0STT
300	800	71.10	AUB30MV0STT

\* PFA 100 bar

### Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

### Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*