


## Duckfoot Bend 90° (1/4) (PECB) with 2 Rotatable Flanges

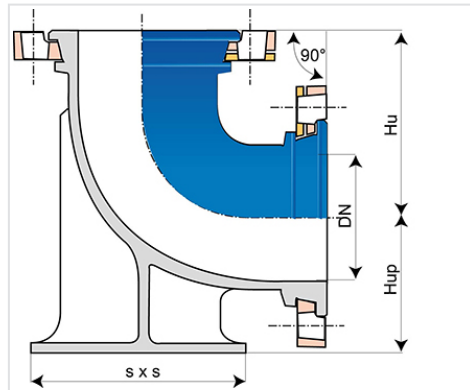

Angle	DN (mm)	Hu (mm)	Hup (mm)	PN 10		PN 16		PN 25		PN 40	
				Mass (kg)	References	Mass (kg)	References	Mass (kg)	References	Mass (kg)	References
90°	60	160	100	10.60	BAA60CF10TT	10.60	BAA60CF10TT	9.80	BAA60CF30TT	9.80	BAA60CF30TT
90°	65	160	100	10.92	BAA65CF10TT	10.92	BAA65CF10TT	11.90	BAA65CF30TT	11.90	BAA65CF30TT
90°	80	165	110	14.00	BAA80CF10TT	14.00	BAA80CF10TT	14.00	BAA80CF10TT	14.00	BAA80CF10TT
90°	100	180	125	17.20	BAB10CF10TT	17.20	BAB10CF10TT				
90°	150	220	160	31.50	BAB15CF10TT	31.50	BAB15CF10TT	33.50	BAB15CF30TT	33.50	BAB15CF30TT
90°	200	260	190	48.00	BAB20CF10TT	48.00	BAB20CF20TT	51.00	BAB20CF30TT		
90°	250	327.5	225	62.10	BAB25CF10TT2	62.10	BAB25CF20TT2	68.90	BAB25CF30TT2		
90°	300	376	255	84.40	BAB30CF10TT2	83.40	BAB30CF20TT2	91.00	BAB30CF30TT2		

### Field of use:

- For drinking water networks

### Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

## Linked products



Flanged joint with hot  
galvanized steel bolts, nuts  
and washers

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*