


## Duckfoot Bend 90° (1/4) IZIFIT with 1 Socket and 1 Fixed Flange

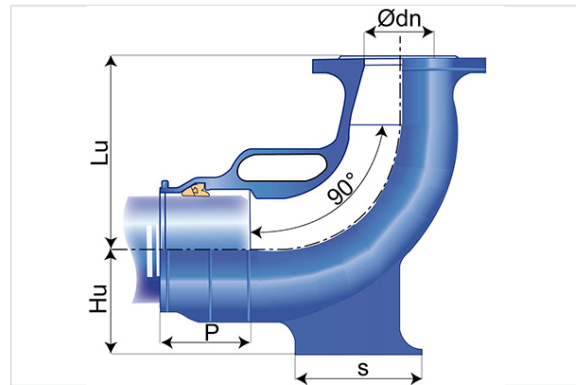

Angle	DN/OD (mm)	ØDE (mm)	DN flange	P (mm)	Lu (mm)	Hu (mm)	s (mm)	Mass (kg)	References
90°	90	90	80 mm	92.5	165	110	107	8.00	KTL90DF0E
90°	110	110	80 mm	99	180	125	126	11.40	KTM11DF0E


### Field of use:

- For drinking water supply networks and connection with plastics piping systems for water transport under pressure in PVC-U, PE or PVC-BO
- All the constituent materials have "Attestation de Conformité Sanitaire" in France (ACS), WRAS and DWI agreements in UK, DVGW agreement in Germany


### Main characteristics:

- Internal and external coating: blue epoxy powder (thickness 250 microns) according to EN 14901-1
- Joints in EPDM according to EN 681-1
- For transport and storage, the joints are protected by plugs
- Conformity to EN12842: ductile iron fittings for PVC-U or PE piping systems
- Conformity to ISO 16631-2016: ductile iron fittings for PVC-U or PE piping systems
- Conformity to NF T 54-948: plastics piping systems for water transport under pressure - pipes made of biaxial oriented poly(vinyl chloride) (PVC-BO)

**Linked products**

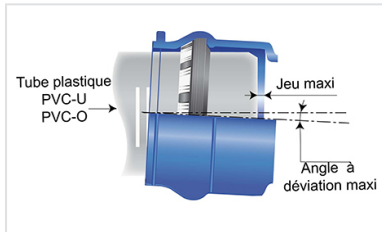

IZIFIT Joint for plastics piping systems

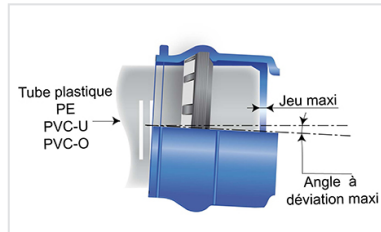

IZIFIT anchored Vi Joint for plastics piping systems

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*