


IM Seal for gravity fittings

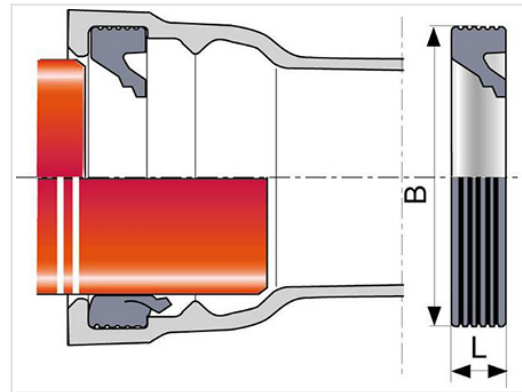

DN (mm)	Joint Ø outside B (mm)	Joint width L (mm)	Angular deflection	Mass (kg)	References
125	178.1	19.8	4 °	0.20	JJB12BB
150	203.6	19.8	4 °	0.20	JTB15BB
200	260.1	24.4	4 °	0.35	JTB20BB
250	307	20	4 °	0.25	JJB25BB
300	358	20	4 °	0.39	JJB30BB

Field of use:

- Separate sewer system
- Application: gravity flow
- Type of effluent: wastewater
- Laying in all types of soils
- Lastingly leak tight and impermeable
- For effluents between pH3 and pH13

Main characteristics:

- TAG 32 seals are in accordance with the requirements of Standard EN 598 (2007)
- Elastomer type WG in accordance with standard EN 681-1
- IM seal NBR
- Supplied in an opaque polyethylene bag
- 2 versions: with or without recesses

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.