


**SELECTA MAXI PMR Gully unit T profile - Access for disabled people -  
Flat grating - C250 class**



AxB (mm)	Grating mass (kg)	Cover mass (kg)	Mass of frame + extension (kg)	Total mass (kg)	Waterway area	Packaging	References
750x640	23	24	44	87.30	9.6 – 12.5 dm <sup>2</sup>	6	ECSE75UFX41

AxB (mm)	C (mm)	D (mm)	E (mm)	H (mm)	h1 (mm)	h2 (mm)	Depth adjustment (mm)
750x640	250	310	347	225	90	65	70

Width of the openings: 18 mm ≤l≤ 20 mm - Length of the openings: 55 mm ≤L≤ 165 mm.

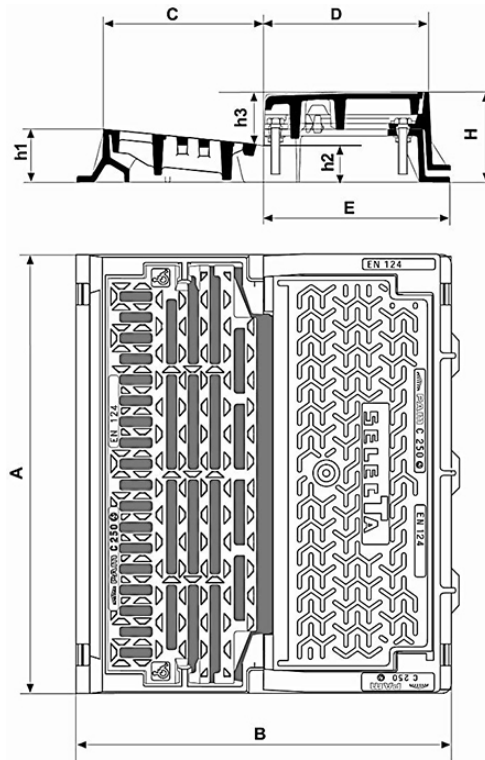

## Material and coating:

- Frame, grating and cover in Ductile Iron EN GJS 400-15: water base

## Origine France Garantie

- This product is made in France in our foundry in Blénod-les-Pont-A-Mousson (54), and is certified Origine France Garantie. This guarantees consumers that the product is made in France in accordance with specifications available on [originefrancegarantie.fr](http://originefrancegarantie.fr). The certification number is: BVCert 6026906.
- “Origine France Garantie certification is awarded by an independent certification body. Checks are then carried out every year to ensure that the product is indeed 100% made in France and that at least 50% of the product’s manufacturing costs (including raw materials) are of French origin”.»

## Field of application:

- C250 class (Group 3) according to standard EN 124-2, destined to the circulated pavements and similar locations exposed to the access of vehicles.
- Compatible with the T1, T2, T3, T4 and T5 kerbs and CS2, CS3 and CS4 gutters according standard to NF P 98-340.
- Conform to the legislation concerning the progression of the people with reduced mobility.

## Main characteristics:

- Grating and cover:
  - Hinged separately and can be easily dismantled
  - Secured by spring-bar lock requiring a tool for the opening.
- Grating optimised for absorption and safety: facets that promote the removal of leaves by rain and ensure the splitting of the film of water.
- Total opening offering a wide surface of access: 540 x 450 mm.
- Frame in 2 parts adjustable in height and slope.
- [Implementation](#)

## Linked products



Gully units SELECTA 500  
and MAXI C250 -  
Implementation

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*