


## Taper PUR PUX with 2 sockets STANDARD

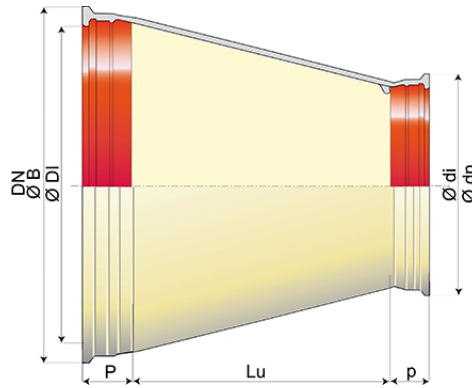

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
1600	1200	645	275	1673	1820	195	1263	1065.00	SSC16VE0BUU
2000	1800	472	290	2089	2269	258	1881.7	1776.00	SSC20VE0FUU


### Field of use:

- Aggressive or soft waters
- For high corrosive soils, industrial pollution zones

### Main characteristics:

- Internal-external coating: polyurethane coating in accordance with Standard EN 15655 (red epoxy coating inside the socket)
- In conformity with EN 545:2010 and ISO 2531:2009

## Linked products

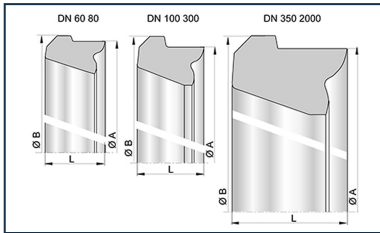

Standard gasket for Pipes  
and Fittings DN60-2000

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*