


45° Angle Branch (all socket) connection to Clay Pipe DN200-250

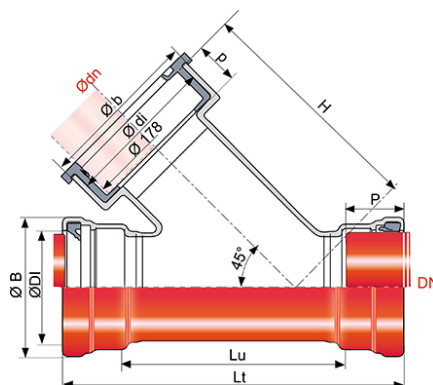

DN (mm)	ØDI (mm)	P (mm)	Lt (mm)	Lu (mm)	ØB (mm)	Ødn (mm)	Ødi mini (mm)	p (mm)	H (mm)	Øb (mm)	Mass (kg)	References
200	223.5	100	570	370	267	150	219	70	428	238	29.00	SJB20TQ0JFF
250	275	100	612	412	310.6	150	219	70	435	238	41.00	SJB25TQ0JFF

Don't forget to order: 2 IM Seal DN200 or 250 and 1 gasket for CLAY pipe "TOPFDICHTUNG" DN150 reference SAP 111232 for connection with CLAY pipes.

Field of use:

- Separate sewer system
- Application: gravity flow
- Type of effluent: wastewater
- Lastingly leak tight and impermeable
- Laying in all types of soils
- For effluents between pH1 and pH13

Main characteristics:

- External and internal coating: red epoxy powder 250µm (PECR)
- IM Gasket in Nitrile
- Fittings and joints are supplied in red-brown polyethylene bag
- EN 598 / CE Marking
- Declaration of performances [DoP-BIOGAN002EN](#)
- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works

- CCTG: Fascicule 70 (sewage work)

Linked products



IM Seal for gravity fittings

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.