


45° Angle Branch PVC DN150-300

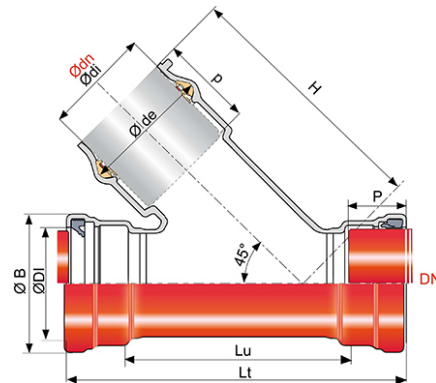

DN (mm)	ØDI (mm)	P (mm)	Lt (mm)	Lu (mm)	ØB (mm)	Ødn (mm)	Ødi mini (mm)	p (mm)	H (mm)	Øde (mm)	Mass (kg)	References
150	173	113	546	320	215	125	127	104	354	151	24.00	TJB15VB0GFF
200	223.5	90	570	370	269	125	127	104	410	151	24.30	TJB20VB0GFF
200	223.5	90	570	370	269	160	162.3	114	450	188.1	32.80	TJB20VB0JFF
250	275	100	612	412	313	160	162.3	114	454	188.1	40.00	TJB25VB0JFF
300	327	100	612	412	365	160	162.3	114	504	188.1	46.20	TJB30VB0JFF

Reference with joint IM + joint KLIKSO

Main characteristics:

- External and internal coating: red epoxy powder 250µm (PECR)
- IM Gasket in Nitrile
- Fittings and joints are supplied in red-brown polyethylene bag
- EN 598 / CE Marking
- Declaration of performances [DoP-BIOGAN002EN](#)
- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works
 - CCTG: Fascicule 70 (sewage work)

Field of use:

- Separate sewer system
 - Application: gravity flow
 - Type of effluent: wastewater
 - Lastingly leak tight and impermeable
 - Laying in all types of soils
 - For effluents between pH1 and pH13
-
- For PLASTIC JUNCTION on angle branch with OD pipes Ø160 mm

Linked products



IM Seal for gravity fittings

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.