


## Alpinal Universal Tyton Taper DN250-300

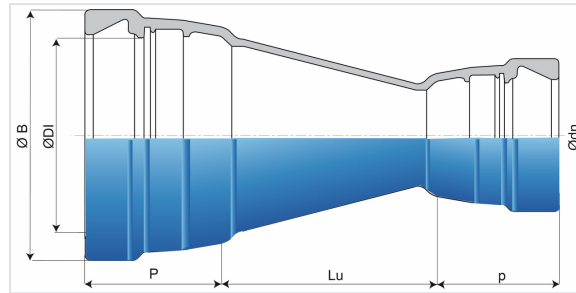

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
250	200	150	166	277.3	347	158	224.5	42.00	SKB25VE0KTT
300	250	150	178	328.5	406	166	276.5	57.30	SKB30VE0LTT

### Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

### Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531

## Linked products



Kit ALPINAL Universal  
Tyton Fitting PECB +  
Universal Tyton Joint



Kit ALPINAL Universal  
Tyton Fitting PECB +  
Universal Tyton Vi Joint



Kit ALPINAL Universal  
Tyton Fitting PECB +  
Universal Tyton Ve Joint

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*