


## Fire hydrant C9+ Non Traffic DN100 - Short version

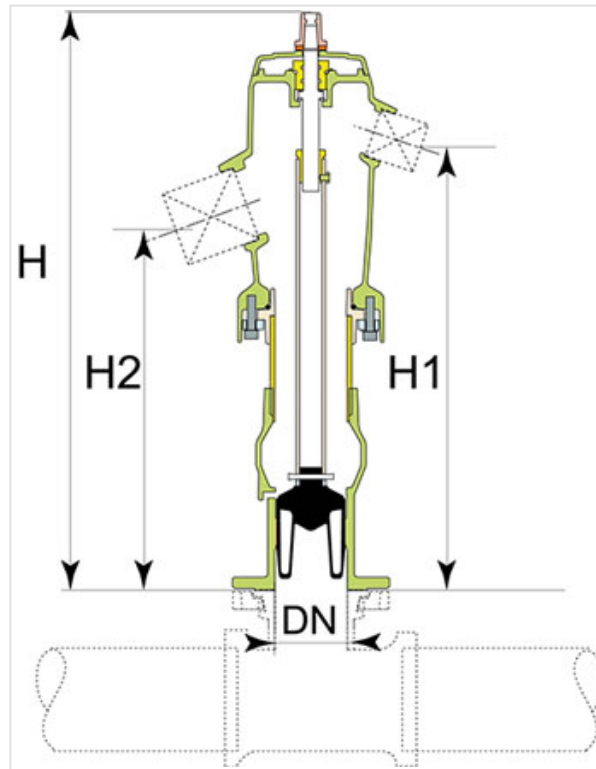

DN (mm)	Version	H (mm)	H1 (mm)	H2 (mm)	Mass (kg)	References
100	Standard	800	605	500	47.00	171528
100	Reinforced	800	605	500	47.00	*

Total height 800mm is a minimal height


### Field of use

Fire hydrants pillar or underground type are designed, according to applicable standards and regulations, for exclusive use of fire protection and using drinking water or raw water network.

They must be handled and used in strict compliance with the recommendations and best practice by personnel trained with these recommendations.

These devices must be inspected periodically (as required by regulations or recommended instructions) to verify and maintain their proper and safe operation.

## Material and coating

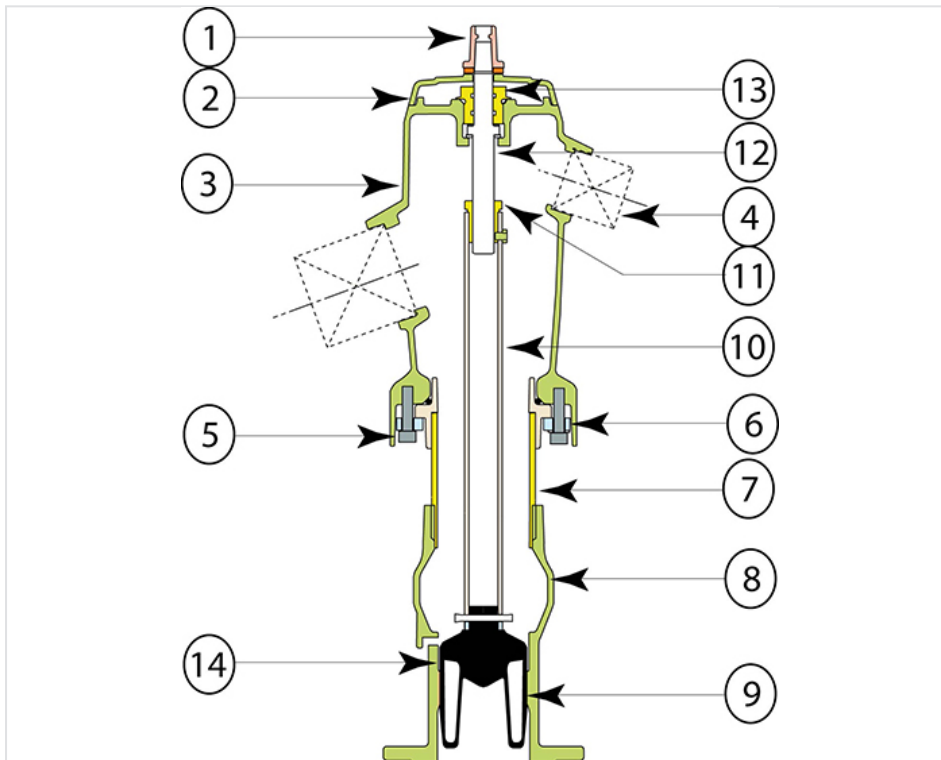

- 1 symmetric frontal outlet DN100
- 2 symmetric lateral outlets DN65
- Straight valve box
- Automatic drainage function

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*