


Iron/PVC Sewerage Adapter with Gasket



Type	ØDE (mm)	P (mm)	L2 (mm)	Lt (mm)	Mass (kg)	References
Ø DE PVC: 125mm - Ø DE ductile iron : 142.5 mini - 145.5 maxi	144,7	108	120	364	0.67	TXB12NEOG
Ø DE PVC: 160mm - Ø DE ductile iron: 168.4 mini - 171.5 maxi	169,7	114	160	370	1.05	TXM16NEOJ

* Adapters are supplied with gasket included

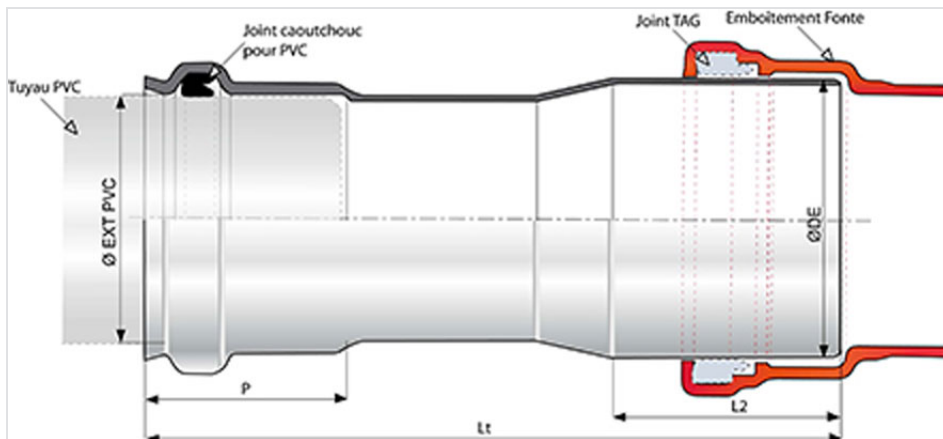

Main characteristics:

- Body in PVC
- IM Gasket in Nitrile
- Fittings and joints are supplied in red-brown polyethylene bag
- EN 598 / CE Marking
- Mark NF

- Declaration of performances
- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works
 - CCTG: Fascicule 70 (sewage work)

Field of use:

- Separate sewer system
 - Application: gravity flow
 - Type of effluent: wastewater
 - Lastingly leak tight and impermeable
 - Laying in all types of soils
 - For effluents between pH1 and pH13
-
- These adapters are used to connect BIOGAN (and INTEGRAL) Socket fittings with PVC pipes

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.