



## Manhole cover PAMTIGHT - D400 class - Disassembling/Reassembly of the cover

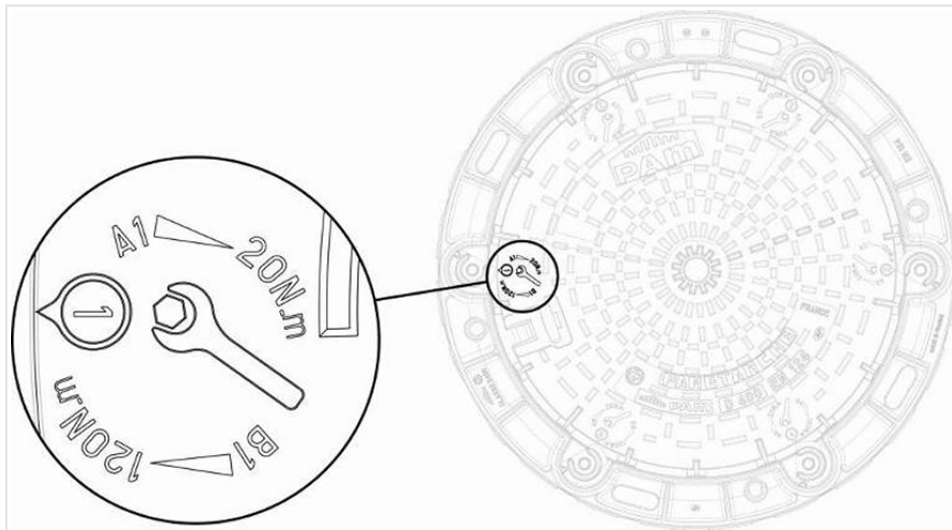

Mass	References
3.00 kg	C49

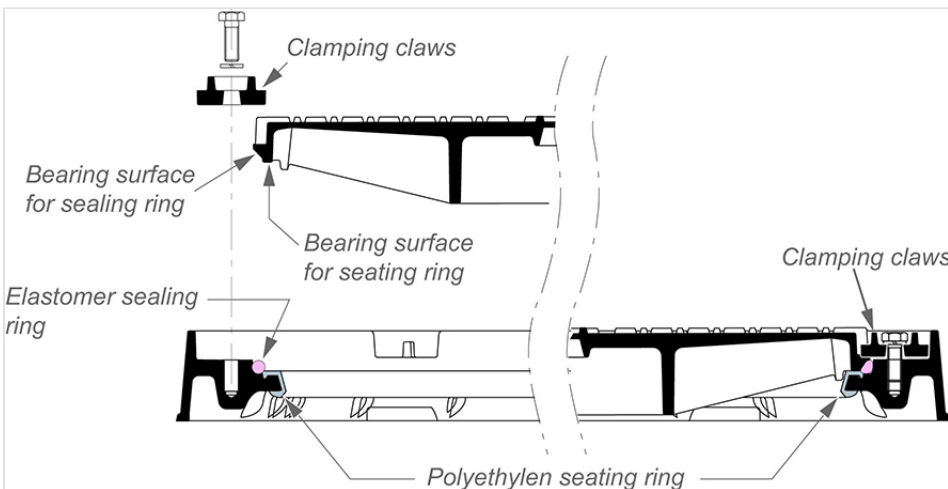

The PAMTIGHT manhole cover is equipped of a polyethylene seating ring and an elastomer sealing ring ensuring the sealing of the manhole cover.

The cover is maintained by 6 clamping claws screwed in the frame.

A note indicating the procedure of disassembling and reassembly of the cover is in a box fasted in the frame of each manhole cover. (To see note below). This box also contains 6 clips anti-rotation.

The orders of clamping claws tightening as well as the recommended tightening torque are also in moulded inscriptions on the cover.

The different elements (clamps, discs, bolts and clips) are available in the form of a kit including the number of parts necessary to equip a manhole cover.

### Linked products



PAMTIGHT manhole covers  
- Anti-rotation clips

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*