


## Joint for Connection on Concrete Manholes

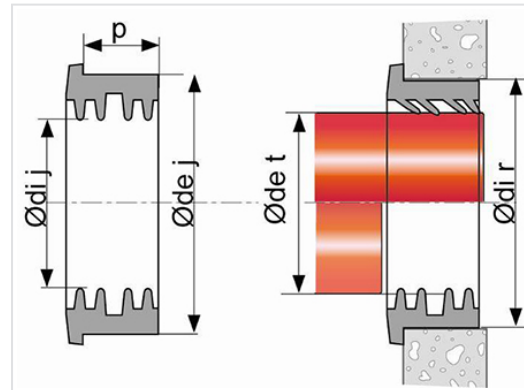

DN (mm)	Ø ext. de j (mm)	Ø int. di j (mm)	Width p (mm)	Type	Ø ext. de t (mm)	Ø int. di r (mm)	Mass (kg)	References
125	176	136	50	1815600	143.7	168±1.5	0.35	144170
150	202	162	50	1568201	172	194±2	0.40	144171
200	255	215	50	1568306	222	245±2	0.50	158311
250	309	269	50	1813403	274	296±1.5	0.50	184951
300	365	319	50	1126803	326	354±2	0.55	158312

### Field of use:

- Separate sewer system
- Application: gravity flow
- Type of effluent: wastewater
- Lastingly leak tight and impermeable
- Laying in all types of soils
- For effluents between pH1 and pH13

### Main characteristics:

- Elastomer WC type in accordance with Standard EN 681-1
- Styrol Butadiene rubber (SBR) joint
- Supplied in red-brown polyethylene bag
- Certificate from MFPA Leipzig
- Hardness 40±5 IRDH

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*