


Flange Socket NATURAL with socket STANDARD and Rotatable Flange

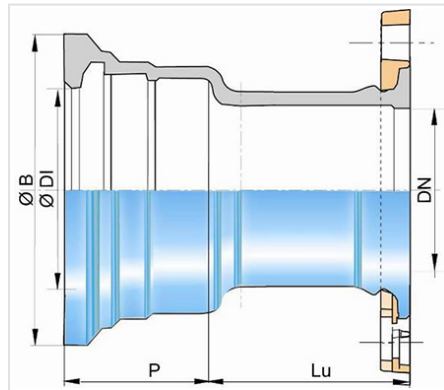

DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	PN 10		PN 16		PN 25		PN 40	
					Mass (kg)	References	Mass (kg)	References	Mass (kg)	References	Mass (kg)	References
60	142	82	80.2	143.5	5.47	NSA60BE10NN2	5.47	NSA60BE10NN2	5.50	NSA60BE30NN2	5.50	NSA60BE30NN2
80	110	85	101.4	167.5	6.67	NSA80BE10NN2	6.67	NSA80BE10NN2	6.67	NSA80BE10NN2	6.67	NSA80BE10NN2
100	110	88	121.4	187.5	8.00	NSB10BE10NN2	8.00	NSB10BE10NN2	9.20	NSB10BE30NN2	9.20	NSB10BE30NN2
125	110	91	147.4	214.5	10.23	NSB12BE10NN2	10.23	NSB12BE10NN2	11.90	NSB12BE30NN2	11.90	NSB12BE30NN2
150	115	94	173.4	241	12.76	NSB15BE10NN2	12.76	NSB15BE10NN2	15.34	NSB15BE30NN2	15.34	NSB15BE30NN2
200	120	100	225.5	294	20.40	NSB20BE10NN2	20.30	NSB20BE20NN2	21.80	NSB20BE30NN2		
250	135	105	277.3	351	31.30	NSB25BE10NN2	30.90	NSB25BE20NN2	33.80	NSB25BE30NN2		
300	130	110	329.3	408.3	42.30	NSB30BE10NN2	41.60	NSB30BE20NN2	45.20	NSB30BE30NN2		

Field of use:

- For drinking water networks
- The scope of use of Aquacoat® fittings in soils is equivalent to that of Natural Biozinalium® pipes, it is suitable for the majority of soils, as defined in appendix D.2.2 of standard EN545:2010. exception :
 - peaty and acidic soils
 - soils containing waste, ashes, slag or contaminated by certain waste or industrial effluents
 - soils located below the level of the marine water table having a resistivity less than 500 Ω cm
- In such soils, or in other aggressive environments, or in the event of stray currents, it is recommended to use other, more suitable types of coatings.

Main characteristics:

- Inside-Outside coating: Aquacoat fittings (AQB) without Bisphenol
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products




Kit Standard Flanged
 Socket AQB + Standard
 Gasket



Kit Standard Fitting AQB +
 Standard Vi Gasket



Kit Standard Fitting AQB +
 Standard Ve Joint

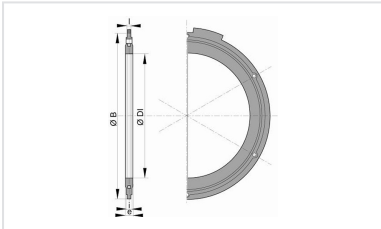

Flanged joint with
 metallized steel bolts and
 nuts

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.