


Flange Spigot (PECB) with Rotatable Flange + Weld bead Ve

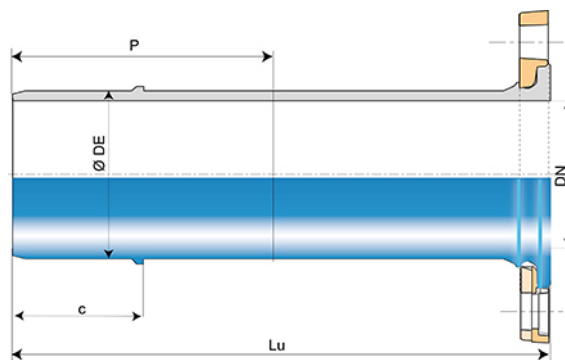

				PN 10		PN 16		PN 25		PN 40	
DN (mm)	Lu (mm)	P (mm)	Bead position c (mm)	Mass (kg)	References	Mass (kg)	References	Mass (kg)	References	Mass (kg)	References
80	350	215	85	7.48	SSA80BV10TT	7.48	SSA80BV10TT	7.48	SSA80BV10TT	7.48	SSA80BV10TT
100	350	215	90	9.60	SSB10BV10TT	9.60	SSB10BV10TT	10.10	SSB10BV30TT	10.10	SSB10BV30TT
125	350	220	95	11.63	SSB12BV10TT	11.63	SSB12BV10TT	13.30	SSB12BV30TT	13.30	SSB12BV30TT
150	400	225	95	12.90	SSB15BV10TT	12.90	SSB15BV10TT	15.00	SSB15BV30TT	15.00	SSB15BV30TT
200	400	230	100	24.50	SSB20BV10TT	24.00	SSB20BV20TT	25.50	SSB20BV30TT		
250	400	240	110	33.90	SSB25BV10TT	33.50	SSB25BV20TT	36.40	SSB25BV30TT		
300	450	250	115	47.00	SSB30BV10TT			50.00	SSB30BV30TT		
450	495	280	120					118.00	SSB45BV30TT		
600	560	310	135	144.00	SSB60BV10TT			190.00	SSB60BV30TT		


Field of use:

- For drinking water networks

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

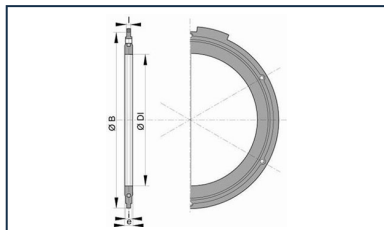

Flanged joint with hot
galvanized steel bolts,
nuts and washers

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.