


## Flange Spigot ALPINAL with Fixed Flange

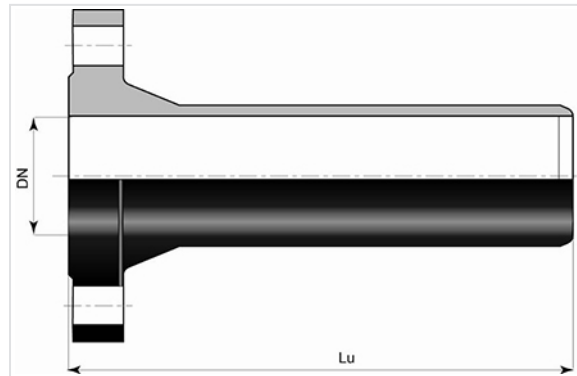

| DN     | Lu     | PN 100   |            | PN 63    |            |
|--------|--------|----------|------------|----------|------------|
|        |        | Mass     | References | Mass     | References |
| 100 mm | 360 mm | 20.50 kg | ANB10BUB   | 20.50 kg | ANB10BU5   |

### Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

### Main characteristics:

- Internal lining: cement mortar
- External coating: bituminous paint
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531

## Linked products



Flanged joint with hot galvanised steel bolts, nuts and washers for ALPINAL

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*