


Flange Spigot IZIFIT and Fixed Flange

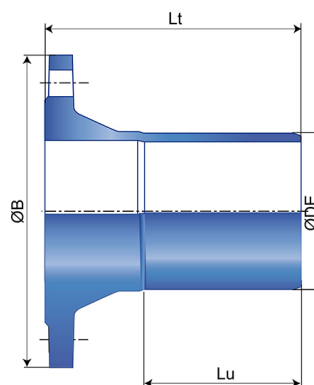

DN/OD (mm)	ØDE (mm)	DN flange	Lu (mm)	Lt (mm)	ØB (mm)	10		16	
						Mass (kg)	References	Mass (kg)	References
75	75	60 mm	98	158	175	3.85	KTL75BU1C	3.85	KTL75BU1C
90	90	80 mm	102	167	200	4.70	KTL90BU1E	4.70	KTL90BU1E
110	110	100 mm	110	180	220	6.00	KTM11BU1F	6.00	KTM11BU1F
125	125	125 mm	114	188	250	7.90	KTM12BU1G	7.90	KTM12BU1G

Field of use:

- For drinking water supply networks and connection with plastics piping systems for water transport under pressure in PVC-U, PE or PVC-BO
- All the constituent materials have "Attestation de Conformité Sanitaire" in France (ACS), WRAS and DWI agreements in UK, DVGW agreement in Germany

Main characteristics:

- Internal and external coating: blue epoxy powder (thickness 250 microns) according to EN 14901-1
- Joints in EPDM according to EN 681-1
- For transport and storage, the joints are protected by plugs
- Conformity to EN12842: ductile iron fittings for PVC-U or PE piping systems
- Conformity to ISO 16631-2016: ductile iron fittings for PVC-U or PE piping systems
- Conformity to NF T 54-948: plastics piping systems for water transport under pressure - pipes made of biaxial oriented poly(vinyl chloride) (PVC-BO)

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.