


Flange Spigot PUR PUX with Fixed Flange

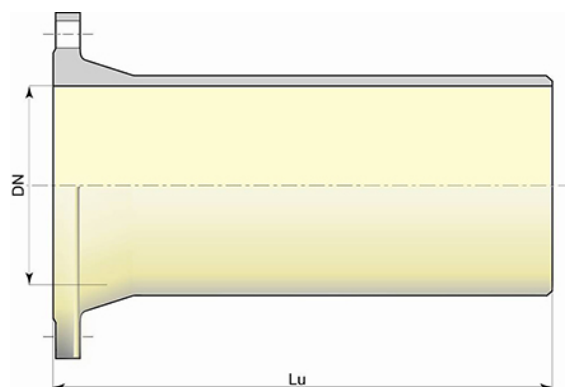

		PN 10		PN 25	
DN (mm)	Lu (mm)	Mass (kg)	References	Mass (kg)	References
1200	600	469.00	SEC12BU10UU		
1400	710	674.00	SSC14BU10UU		
1500	750	802.00	SSC15BU10UU		
1600	780			1026.00	SSC16BU30UU


Field of use:

- Aggressive or soft waters
- For high corrosive soils, industrial pollution zones

Main characteristics:

- Internal-external coating : polyurethane coating in accordance with Standard EN 15655
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

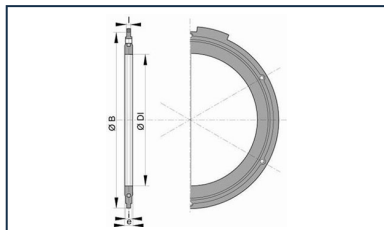

Flanged joint with hot
galvanized steel bolts,
nuts and washers

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.