


## Grating AQUA-MAX Square frame D400 class



| CxD (mm) | AxB (mm) | F (mm) | H (mm) | Total Mass (kg) | Waterway area        | Packaging | References |
|----------|----------|--------|--------|-----------------|----------------------|-----------|------------|
| 660x550  | 450x450  | 280    | 100    | 45.40           | 12.4 dm <sup>2</sup> | 12        | 205864     |
| 660x550  | 450x450  | 280    | 150    | 48.80           | 12.4 dm <sup>2</sup> | 9         | 205865     |

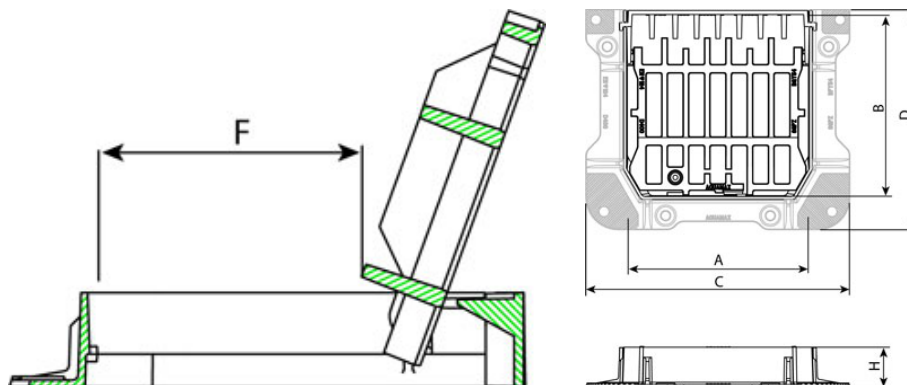

## Material and coating

- Frame and grating in Ductile Iron EN GJS 400-15: water base

## Field of application

- D400 class (Group 4) according to standard EN124
- Multidirectional punctual or kerbside collection

## Main characteristics

- Captive hinged grating
- Non-rock design
- Single-piece grating
- LTS installation and durability features
- Automatic grating security locking
- Wedge seating
- HA 104/2 compliant
- Sewers for Adoption 6 compliant

## Security

- Options: additional security locking option

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*