


Kit Standard TT PE Pipe + Standard Gasket

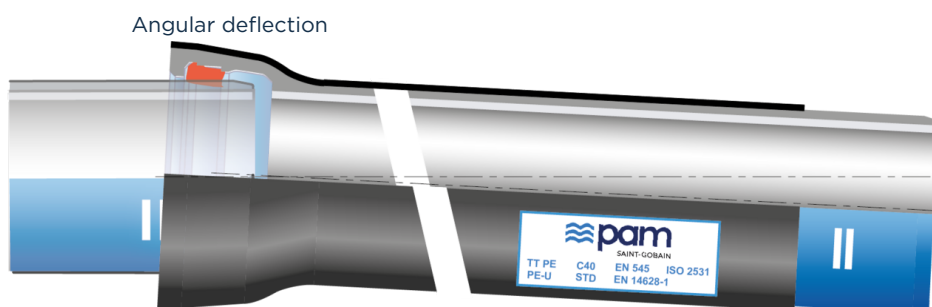


DN	Class	Angular deflection	PFA	References
80	C40	5 °	40 bar	SSA80Q60AG-E00
100	C40	5 °	40 bar	SSB10Q60AG-E00
125	C40	5 °	40 bar	SSB12Q60AG-E00
150	C40	5 °	40 bar	SSB15Q60AG-E00
200	C40	5 °	40 bar	SSB20Q60AG-E00
250	C40	5 °	40 bar	SSB25Q60AG-E00
300	C40	5 °	40 bar	SSB30F60AG-E00
350	C30	4 °	30 bar	SSB35G60AG-E00
400	C30	4 °	30 bar	SSB40G60AG-E00
450	C30	4 °	30 bar	SSB45G60AG-E00
500	C30	4 °	30 bar	SSB50G60AG-E00
600	C30	4 °	30 bar	SSB60G60AG-E00
700	C25	4 °	25 bar	SSB70H60AG-E00
800	C25	4 °	25 bar	SSB80H70AG-E00
900	C25	4 °	25 bar	SSB90H70AG-E00
1000	C25	4 °	25 bar	SSC10H70AG-E00

- DN60 to 300 : Reference pipe + joint + Elastomer Sleeve
- DN350 to 700 : Reference pipe + joint + Heat-shrink Collar
- DN $\geq$ 800 : Reference pipe + joint only. Don't forget to add roll of 30m Heat-shrink Collar and box of 25 Closing sleeve. Quantity to be determined depending on the project.


Accessories



Elastomer Sleeve TT PE -
Protection of joints of
pipes and fittings DN60
to 300

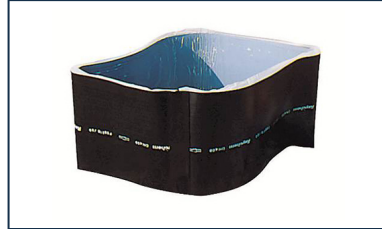


Heat-shrink Collar for TT
PE Standard and
Universal

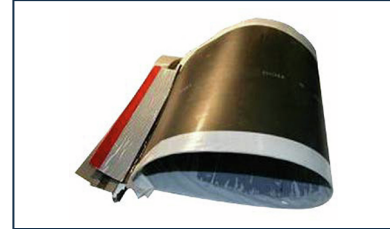


Heat-shrink Collar for TT
PE Standard et Universal
- Roll

Linked products

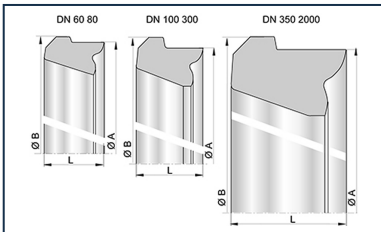

Standard gasket for Pipes
and Fittings DN60-2000

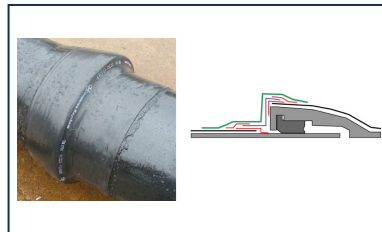

Assembly of the
aluminium sleeve on TT
pipes

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.