


Kit Standard TT PE Pipe + Standard Vi Gasket

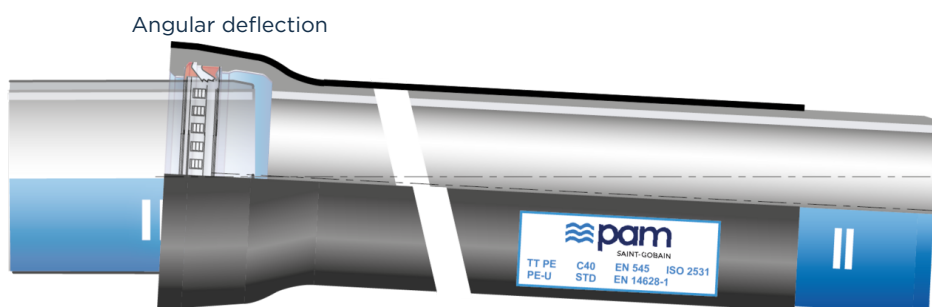


DN	Class	Angular deflection	PFA	References
80	C40	5 °	16 bar	SSA80Q60AG-E06
100	C40	5 °	16 bar	SSB10Q60AG-E06
125	C40	5 °	16 bar	SSB12Q60AG-E06
150	C40	5 °	16 bar	SSB15Q60AG-E06
200	C40	4 °	16 bar	SSB20Q60AG-E06
250	C40	4 °	16 bar	SSB25Q60AG-E06
300	C40	3 °	16 bar	SSB30F60AG-E06
350	C30	3 °	16 bar	SSB35G60AG-E06
400	C30	2 °	16 bar	SSB40G60AG-E06
450	C30	2 °	13 bar	SSB45G60AG-E06
500	C30	2 °	11 bar	SSB50G60AG-E06
600	C30	2 °	10 bar	SSB60G60AG-E06
700	C25	2 °	10 bar	SSB70H60AG-E06
700	C25	2 °	10 bar	SSB70H70AG-E06

- DN60 to 300 : Reference pipe + joint + Elastomer Sleeve
- DN350 to 700 : Reference pipe + joint + Heat-shrink Collar

Accessories




Elastomer Sleeve TT PE -
Protection of joints of
pipes and fittings DN60
to 300

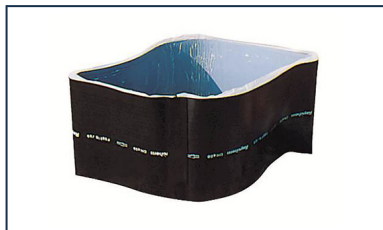


Heat-shrink Collar for TT
PE Standard and
Universal

Linked products

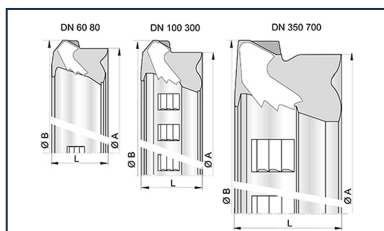

STD Vi gasket for Pipes
and Fittings DN60-700

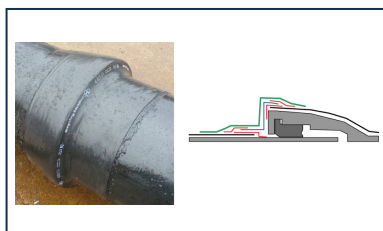

Assembly of the
aluminium sleeve on TT
pipes

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.