


Kit Universal Standard Fitting PECB + Universal Standard Ve Joint

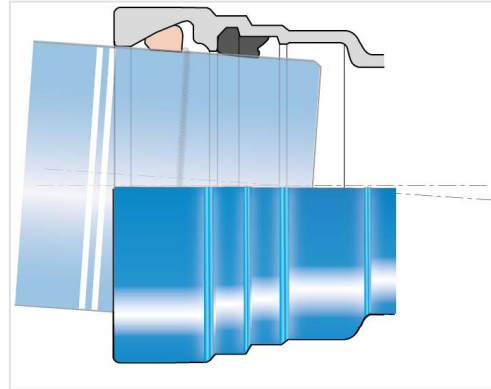

Universal Standard Bend

DN	Angle	Weight of Kit	References
100	45°	19.6 kg	SFB10CB00TT-E02
100	22°30	18.7 kg	SFB10CD00TT-E02
100	11°15	18.6 kg	SFB10CE00TT-E02
125	11°15	18.26 kg	SFB12CE00TT-E02
150	45°	29.24 kg	SFB15CB00TT-E02
150	22°30	27.84 kg	SFB15CD00TT-E02
150	11°15	27.24 kg	SFB15CE00TT-E02
200	90°	51.36 kg	SFB20CA00TT-E02
200	45°	44.56 kg	SFB20CB00TT-E02
200	30°	42.16 kg	SFB20CC00TT-E02
200	22°30	40.26 kg	SFB20CD00TT-E02
200	11°15	39.46 kg	SFB20CE00TT-E02
250	90°	68.4 kg	SFB25CA00TT-E02
250	45°	58.1 kg	SFB25CB00TT-E02
250	30°	54.9 kg	SFB25CC00TT-E02
250	22°30	54 kg	SFB25CD00TT-E02
250	11°15	51.7 kg	SFB25CE00TT-E02
300	90°	100.02 kg	SFB30CA00TT-E02
300	45°	83.42 kg	SFB30CB00TT-E02
300	30°	80.02 kg	SFB30CC00TT-E02
300	22°30	76.52 kg	SFB30CD00TT-E02

DN	Angle	Weight of Kit	References
300	11°15	70.72 kg	SFB30CE00TT-E02
400	90°	149.56 kg	SFB40CA00TT-E02
400	45°	127.76 kg	SFB40CB00TT-E02
400	30°	110.56 kg	SFB40CC00TT-E02
400	22°30	106.36 kg	SFB40CD00TT-E02
400	11°15	95.56 kg	SFB40CE00TT-E02
500	90°	246.38 kg	SFB50CA00TT-E02
500	45°	195.78 kg	SFB50CB00TT-E02
500	30°	175.68 kg	SFB50CC00TT-E02
500	22°30	172.68 kg	SFB50CD00TT-E02
500	11°15	150.68 kg	SFB50CE00TT-E02
600	90°	367.02 kg	SFB60CA00TT-E02
600	45°	300.72 kg	SFB60CB00TT-E02
600	30°	251.02 kg	SFB60CC00TT-E02
600	22°30	238.72 kg	SFB60CD00TT-E02
600	11°15	207.72 kg	SFB60CE00TT-E02
700	45°	533.74 kg	SFB70CB00TT-E02
700	22°30	443.74 kg	SFB70CD00TT-E02
700	11°15	393.74 kg	SFB70CE00TT-E02
800	45°	738.14 kg	SFB80CB00TT-E02
800	22°30	588.14 kg	SFB80CD00TT-E02
800	11°15	508.14 kg	SFB80CE00TT-E02
1000	45°	1142.08 kg	SFC10CB00TT-E02
1000	22°30	956.08 kg	SFC10CD00TT-E02
1000	11°15	857.08 kg	SFC10CE00TT-E02

Universal Standard Taper

DN	Ø dn	Weight of Kit	References
150	100 mm	21.92 kg	SFB15VE0FTT-E02
250	200 mm	43.58 kg	SFB25VE0KTT-E02
400	300 mm	92.79 kg	SFB40VE0MTT-E02
500	400 mm	139.27 kg	SFB50VE0NTT-E02

Universal Standard All Socket Tee

DN	Ø dn	Weight of Kit	References
100	100	26.6 kg	SFB10TE0FTT-E02
150	100	35.84 kg	SFB15TE0FTT-E02
150	150	41.56 kg	SFB15TE0JTT-E02
200	100	50.46 kg	SFB20TE0FTT-E02
250	250	83.4 kg	SFB25TE0LTT-E02
300	100	84.82 kg	SFB30TE0FTT-E02
300	200	101.6 kg	SFB30TE0KTT-E02

Universal Standard Double Socket Tee

DN	Ø dn	PN	Weight of Kit	References
100	80	10 16 25 40	22.8 kg	SFB10UD1ETT-E02
100	100	10 16	24.1 kg	SFB10UD1FTT-E02
100	100	25 40	24.6 kg	SFB10UD3FTT-E02
125	80	10 16 25 40	23.26 kg	SFB12UD1ETT-E02
150	100	10 16	33.64 kg	SFB15UD1FTT-E02
150	150	10 16	38.64 kg	SFB15UD1JTT-E02
200	80	10 16 25 40	46.46 kg	SFB20UD1ETT-E02
200	100	10 16	48.56 kg	SFB20UD1FTT-E02
200	100	25 40	49.06 kg	SFB20UD3FTT-E02
200	200	16	60.56 kg	SFB20UD2KTT-E02
250	100	25 40	62.84 kg	SFB25UD3FTT-E02
250	250	16	83.8 kg	SFB25UD2LTT-E02
300	80	10 16 25 40	74.52 kg	SFB30UD1ETT-E02
300	100	10 16	84.92 kg	SFB30UD1FTT-E02
300	100	25 40	85.42 kg	SFB30UD3FTT-E02
300	150	10 16	91.32 kg	SFB30UD1JTT-E02
300	300	16	114.02 kg	SFB30UD2MTT-E02
400	80	10 16 25 40	93.96 kg	SFB40UD1ETT-E02
400	100	10 16	96.56 kg	SFB40UD1FTT-E02
400	100	25 40	97.56 kg	SFB40UD3FTT-E02
400	150	25 40	113.76 kg	SFB40UD3JTT-E02
400	400	10	183.24 kg	SFB40UD1NNT-E02
500	80	10 16 25 40	161.38 kg	SFB50UD1ETT-E02
500	100	10 16	158.68 kg	SFB50UD1FTT-E02

DN	Ø dn	PN	Weight of Kit	References
500	100	25 40	159.68 kg	SFB50UD3FTT-E02
500	150	10 16	177.68 kg	SFB50UD1JTT-E02
500	150	25 40	178.78 kg	SFB50UD3JTT-E02
500	200	10	191.68 kg	SFB50UD1KTT-E02
500	200	16	191.58 kg	SFB50UD2KTT-E02
500	300	10	208.98 kg	SFB50UD1MTT-E02
500	300	16	208.28 kg	SFB50UD2MTT-E02
500	400	16	243.48 kg	SFB50UD2NTT-E02
500	500	10	361.68 kg	SFB50UD1QTT-E02
500	500	16	374.68 kg	SFB50UD2QTT-E02
500	500	25	380.68 kg	SFB50UD3QTT-E02
600	100	10 16	244.52 kg	SFB60UD1FTT-E02
600	100	25 40	245.72 kg	SFB60UD3FTT-E02
600	150	10 16	245.88 kg	SFB60UD1JTT-E02
600	150	25 40	247.92 kg	SFB60UD3JTT-E02
600	200	10	253.72 kg	SFB60UD1KTT-E02
600	200	16	253.72 kg	SFB60UD2KTT-E02
600	250	16	300.92 kg	SFB60UD2LTT-E02
600	300	10	311.72 kg	SFB60UD1MTT-E02
600	300	16	311.72 kg	SFB60UD2MTT-E02
600	400	16	323.52 kg	SFB60UD2NTT-E02
600	600	10	401.72 kg	SFB60UD1RTT-E02
600	600	16	426.72 kg	SFB60UD2RTT-E02
700	150	10 16	446.74 kg	SFB70UD1JTT-E02
700	150	25 40	448.74 kg	SFB70UD3JTT-E02
700	200	10	471.64 kg	SFB70UD1KTT-E02
700	200	16	471.84 kg	SFB70UD2KTT-E02
700	200	25	473.12 kg	SFB70UD3KTT-E02
700	300	10	554.74 kg	SFB70UD1MTT-E02
700	300	16	553.74 kg	SFB70UD2MTT-E02
700	300	25	555.74 kg	SFB70UD3MTT-E02
700	400	10	609.74 kg	SFB70UD1NTT-E02
700	400	16	613.74 kg	SFB70UD2NTT-E02
700	400	25	622.74 kg	SFB70UD3NTT-E02

DN	Ø dn	PN	Weight of Kit	References
800	200	10	568.14 kg	SFB80UD1KTT-E02
800	200	16	568.14 kg	SFB80UD2KTT-E02
800	200	25	569.14 kg	SFB80UD3KTT-E02
800	600	10	858.14 kg	SFB80UD1RTT-E02
800	600	16	916.14 kg	SFB80UD2RTT-E02
800	600	25	886.14 kg	SFB80UD3RTT-E02
1000	600	10	1479.08 kg	SFC10UD1RTT-E02
1000	600	16	1461.08 kg	SFC10UD2RTT-E02
1000	600	25	1464.08 kg	SFC10UD3RTT-E02

Universal Standard Flanged Socket


DN	Weight of Kit	References
100	12.1 kg	SFB10BE10TT-E02
100	13.11 kg	SFB10BE30TT-E02
125	12.38 kg	SFB12BE10TT-E02
150	22.42 kg	SFB15BE10TT-E02
150	20.13 kg	SFB15BE30TT-E02
200	27.18 kg	SFB20BE10TT-E02
200	27.18 kg	SFB20BE20TT-E02
200	30.38 kg	SFB20BE30TT-E02
200	31.68 kg	SFB20BE40TT-E02
250	36.5 kg	SFB25BE10TT-E02
250	36.5 kg	SFB25BE20TT-E02
250	41.67 kg	SFB25BE30TT-E02
250	44.8 kg	SFB25BE40TT-E02
300	50.51 kg	SFB30BE10TT-E02
300	50.51 kg	SFB30BE20TT-E02
300	53.21 kg	SFB30BE30TT-E02
300	79.91 kg	SFB30BE40TT-E02
400	66.38 kg	SFB40BE10TT-E02
400	66.02 kg	SFB40BE20TT-E02
400	78.02 kg	SFB40BE30TT-E02
500	115.84 kg	SFB50BE10TT-E02
500	93.58 kg	SFB50BE20TT-E02
500	103.73 kg	SFB50BE30TT-E02

DN	Weight of Kit	References
500	187.84 kg	SFB50BE40TT-E02
600	169.36 kg	SFB60BE10TT-E02
600	194.36 kg	SFB60BE20TT-E02
600	197.36 kg	SFB60BE30TT-E02
700	331.87 kg	SFB70BE10TT-E02
700	280.87 kg	SFB70BE20TT-E02
700	310.87 kg	SFB70BE30TT-E02
800	349.07 kg	SFB80BE10TT-E02
800	404.07 kg	SFB80BE20TT-E02
800	469.07 kg	SFB80BE30TT-E02
1000	561.54 kg	SFC10BE10TT-E02
1000	578.54 kg	SFC10BE20TT-E02
1000	644.54 kg	SFC10BE30TT-E02

DN mm	PFA bar
100	85
125	63
150	63
200	63
250	50
300	41
400	35
500	30
600	30
700	27
800	25
900	25
1000	25
1200	20
1200	25
1400	16
1400	25
1500	16

DN	PFA
mm	bar
1600	16

Linked products

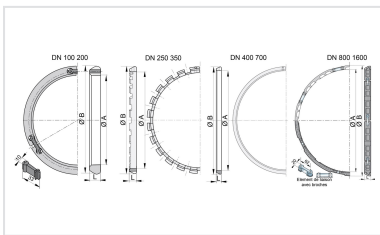

UNI STD Ve joint for Pipes and Fittings DN80-1600

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.