


Kit Universal Standard TT PE Pipe + Universal Standard Vi Joint

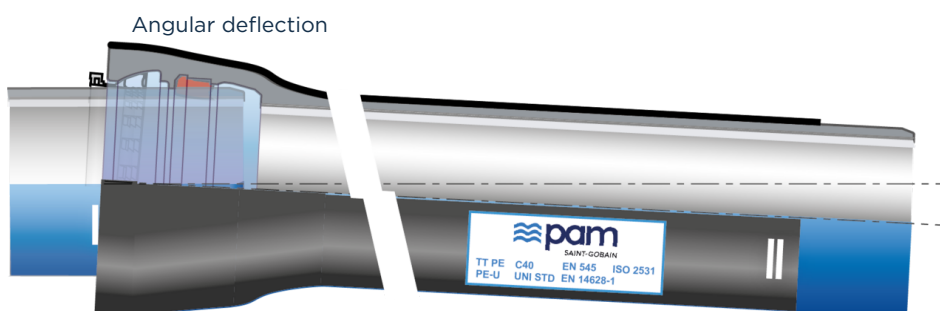


DN	Class	Angular deflection	PFA	References
80	C100	3 °	60 bar	SGA80N60AG-E06
100	C100	3 °	56 bar	SGB10N60AG-E06
125	C64	3 °	52 bar	SGB12N60AG-E06
150	C64	3 °	48 bar	SGB15N60AG-E06
200	C64	3 °	43 bar	SGB20N60AG-E06
250	C50	3 °	39 bar	SGB25N60AG-E06
300	C50	3 °	34 bar	SGB30N60AG-E06
350	C40	3 °	25 bar	SGB35N60AG-E06
400	C40	3 °	20 bar	SGB40N60AG-E06
450	C40	3 °	16 bar	SGB45N60AG-E06
500	C40	2 °	16 bar	SGB50N60AG-E06
600	C40	2 °	16 bar	SGB60N60AG-E06
700	C30	2 °	10 bar	SGB70G70AG-E06

- DN60 to 300 : Reference pipe + joint + Elastomer Sleeve
- DN350 to 700 : Reference pipe + joint + Heat-shrink Collar

Accessories




Elastomer Sleeve TT PE -
Protection of joints of
pipes and fittings DN60
to 300

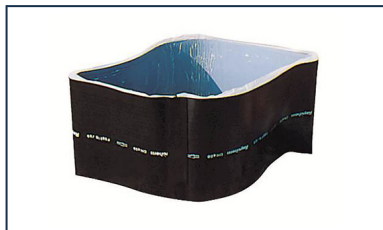


Heat-shrink Collar for TT
PE Standard and
Universal


Linked products

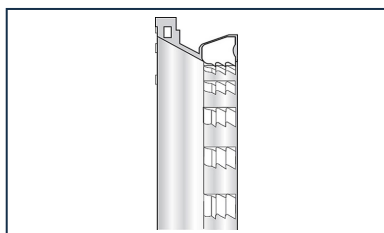

UNI STD Vi joint for Pipes
and Fittings DN80-700

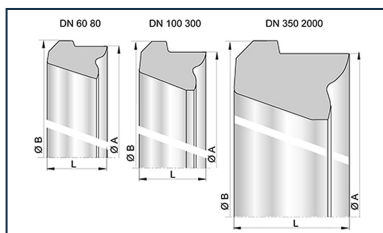

Standard gasket for Pipes
and Fittings DN60-2000

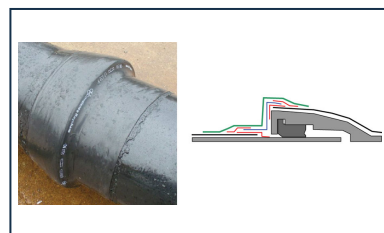

Assembly of the
aluminium sleeve on TT
pipes

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.