


TELECOM Duct cover T-MAX-i L5T C250

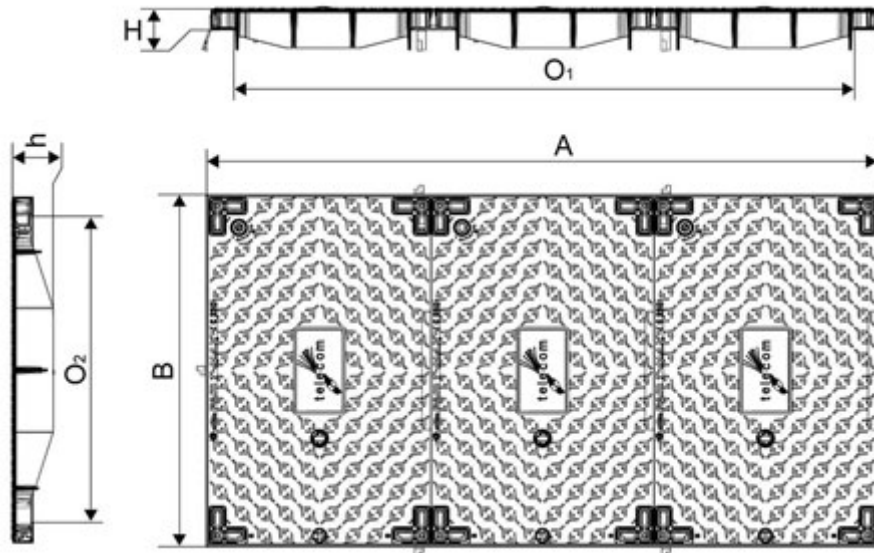

AxB (mm)	O1xO2 (mm)	H (mm)	h (mm)	Total mass (kg)	Cover mass (kg)	Packaging	References
1915x1004	1795x884	60	118	215.00	61	5	DCL5TMIZTEL
1915x1004	1795x884	60	118	215.00	61	5	DCL5TMIZ

Material and coating:

- Cover 990x633mm in Ductile Iron EN GJS 400-15: water base
- Frames in steel, galvanized

Field of application:

- C250 class (Group 3) according to standard EN 124-2, intended for the circulated pavements and similar locations subjected to the passage of vehicles.
- Conforms to NF P98-050-2 for underground structures for the accommodation of dry networks - Part 2: Closing devices



Main characteristics:

- Frame in galvanized steel angles 60 x 60 x 6 mm.
- Covers with soundproofing pads.
- Articulation and security kits (optional) being able to set up on place.

Conformity:

Saint-Gobain PAM attests that:

- the above mentioned products are manufactured in compliance with specifications, materials & characteristics as per EN124-2 : 2015 standard
- the features and performances of the above mentioned products are controlled and comply with requirements of EN124-1 : 2015 standard

The PAM brand affixed on these related products materialises this attestation of conformity.

Kits

- Security, articulation and assistance [D31](#) (quantity 2) and [D32](#) (quantity 1)

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.