



## Manhole cover PAMTIGHT - D400 class Round frame - Sealed

Torque for clamping claws

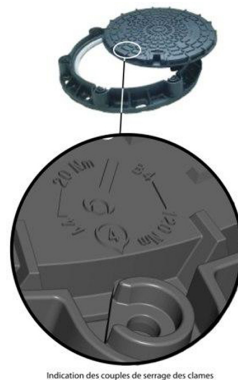

| A (mm) | C (mm) | O (mm) | H (mm) | E (mm) | F (mm) | Total Mass (kg) | Cover mass (kg) | Packaging | References |
|--------|--------|--------|--------|--------|--------|-----------------|-----------------|-----------|------------|
| 850    | 680    | 610    | 100    | 94     | 50     | 95.00           | 48.8            | 10        | CDPE60AA   |

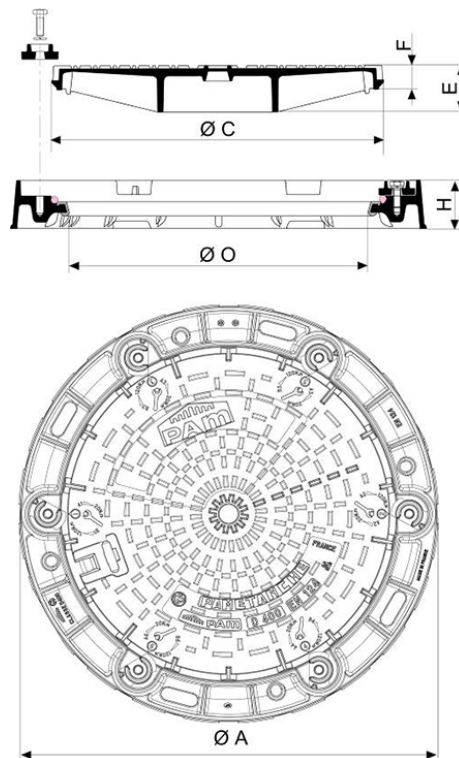

## Material and coating:

- Frame and cover in Ductile Iron EN GJS 400-15: bituminous varnish or water base
- [Ring in PE](#)

## Field of application:

- D400 class (Group 4) according to standard EN124-2, carriageways of roads, hard shoulders and parking areas for all types of road vehicles.
- Normal traffic areas and infrequent inspections.


## Main characteristics:

- Sealed of water to a 1 bar positive or negative pressure rating
- Sealed handling box
- [Fastened of a cover in his frame by 6 bolts and clamping claws](#)
- [Equipped of clips avoiding the looseness of the clamping claws](#)
- Anti-theft function in option, performed by 3 hexagonal head screws + 3 anti-theft screws (reference CDPE60AFX52)
- Elastomer sealing ring: reference CDPE60AF-L
- Watertightness attestation

## Linked products



Polyethylene ring

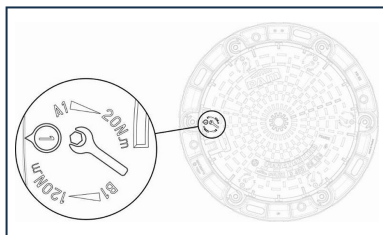

Manhole cover  
PAMTIGHT - D400 class -  
Disassembling/  
Reassembly of the cover



PAMTIGHT manhole  
covers - Anti-rotation  
clips

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*