



Manhole cover URBAMAX Class E600 Square Frame - Non-Ventilated

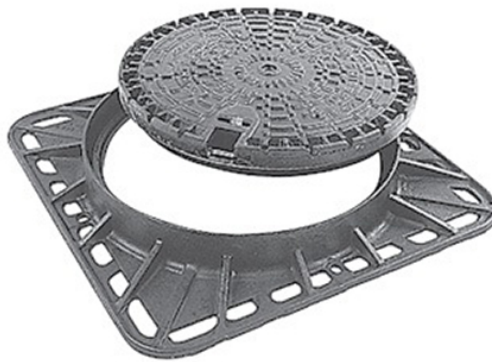

AxA (mm)	C (mm)	O (mm)	E (mm)	F (mm)	H (mm)	Total Mass (kg)	Cover mass (kg)	Packaging	References
850x850	657	600	85	49	100	100.40	59	10	CEUR60KF

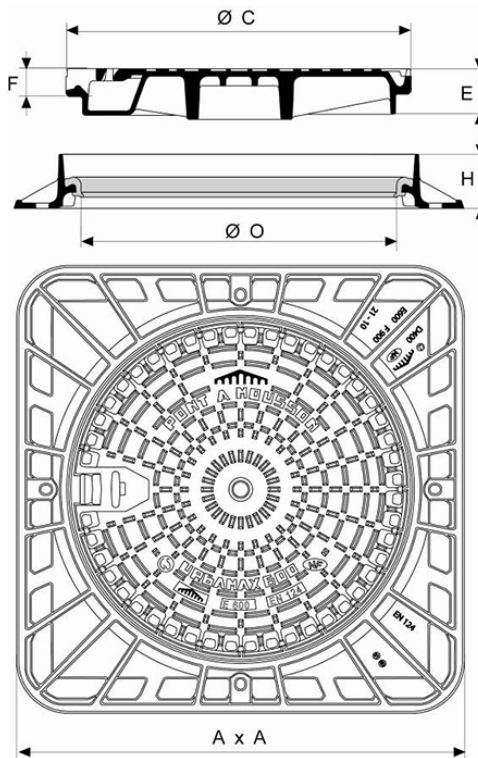

Material and coating:

- Frame and cover in Ductile Iron EN GJS 400-15: water base coating
- [Ring in elastomer](#)

Field of application:

- Class E600 suitable for use in areas where heavy wheel loads are imposed such as loading areas, docks or aircraft pavements.

Main characteristics:

- High resistance
- Handling box suitable for pick-axe, crowbar...
- Elastomer ring

Linked products



Elastomer Ring

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.