


Manhole Cover VIATOP M STANDARD Class D400 Round frame - Non Ventilated

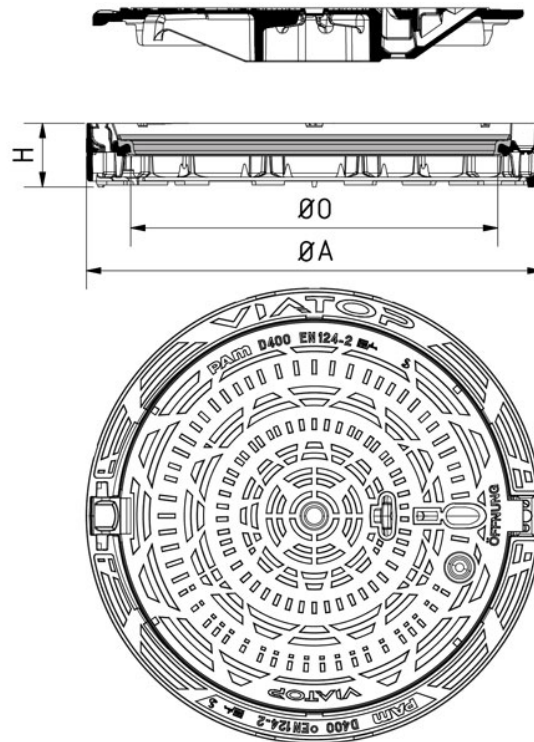

Viatop M supersedes all previous versions of CO 600mm Viatop manhole covers.

A (mm)	O (mm)	H (mm)	Total Mass (kg)	Cover mass (kg)	Packaging	References
785	610	110	83.25	47.5	10	CDVM60AG

Material and coating:

- Frame and cover in Ductile Iron EN GJS 400-15: water base coating
- [Ring in elastomer](#)

Field of application:

- D400 class (Group 4) according to standard DIN EN 124-2, carriageways of roads, hard shoulders and parking areas for all types of road vehicles.
- Heavy traffic zones and frequent visits.

Main characteristics:

- 100mm-deep slightly liftable frame, with cylindrical shape, without flange. Not height adjustable as Viatop “Niveau” versions
- Continuous elastomeric gasket with, 2-directional disconnection between frame & cover
- Orientation of cover during installation is traffic-direction sensitive
- Rated pedestrians’ slip-resistant chequer plate
- Hinged cover opens to 100° with safety blocking at 90°
- [Hinged cover and ergonomic multi-tool handling box](#)
- Cover fittable on any previous Viatop frames
- Available markings of fields of application: SW, RW, WASSER
- Wide choice of cover customization locations & sizes (up to 80% of the surface) offered, consult sales organisations

Security

- [Retro-fittable ¼ turn locking system](#)
- [Specific Viatop mudpan only](#)
- [Operating key C24](#)


Linked products



Elastomer Ring



¼ turn locks

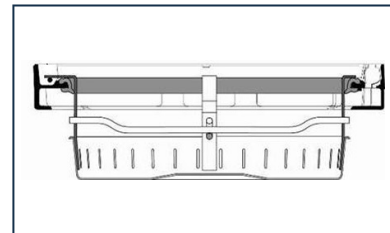

Mudpan for VIATOP/
DYNATOP Manhole
covers



Accessories for Manhole
Covers: operating key
C24 for PAMREX, VIATOP
and VIATOP 2 Manhole
covers

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.