


QUICK PVC and BLUTOP - Simple version





DN flange (mm)	DN/OD (mm)	ØDE (mm)	A (mm)	B (mm)	Mass (kg)	References
40	40	40	50	150	1.20	MAL40DACH
40/50	50	50	53	165	1.50	MAL50DACH
50	63	63	54	165	1.80	MAL60DACH
60/65	63	63	54	185	2.00	MAL65DACH
60/65	75	75	58	185	2.30	MAL75DACH
80	90	90	62	200	2.60	MAL90DACH
100	110	110	68	220	3.08	160754
125	125	125	73	250	4.06	160755
125	140	140	76	250	4.08	160756
150	160	160	82	285	5.20	160757
200	200	200	91	340	7.50	160758
200	225	225	93	340	7.10	160759

Note: BLUTOP range for DN75, 90, 110, 125 and 160

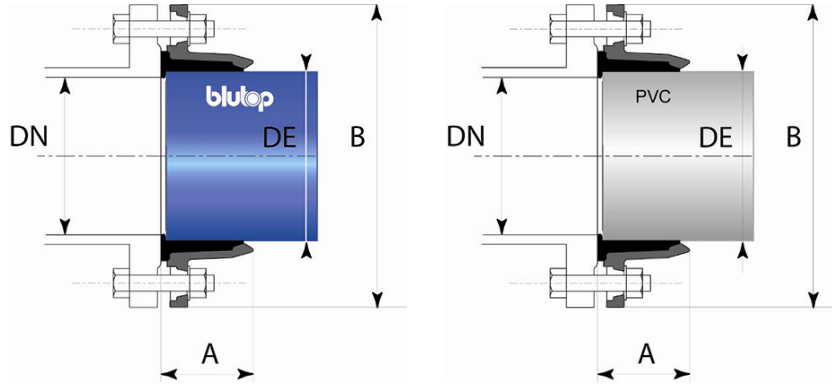

Material and coating

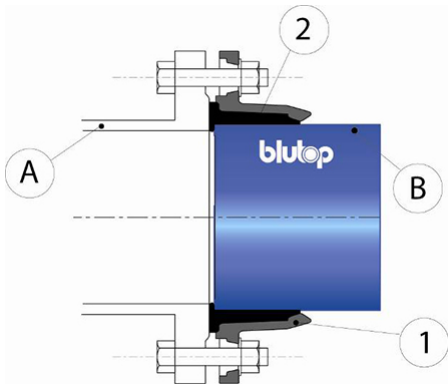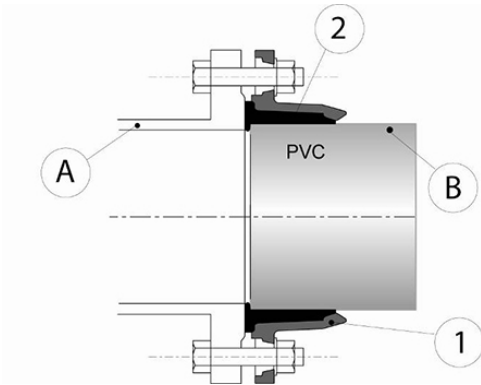

Item	Designation	Material	Coating
1	Counter-flange	GS ductile iron	Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)

Item	Designation	Material	Coating
2	Tightness gasket	EPDM	
A	Valve	Ductile iron	
B	Pipe	PVC or Ductile iron (BLUTOP)	

Marking



The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.