


## Socket Spigot piece ALPINAL with 1 socket UNIVERSAL TYTON and 1 spigot-end + threaded Gaz

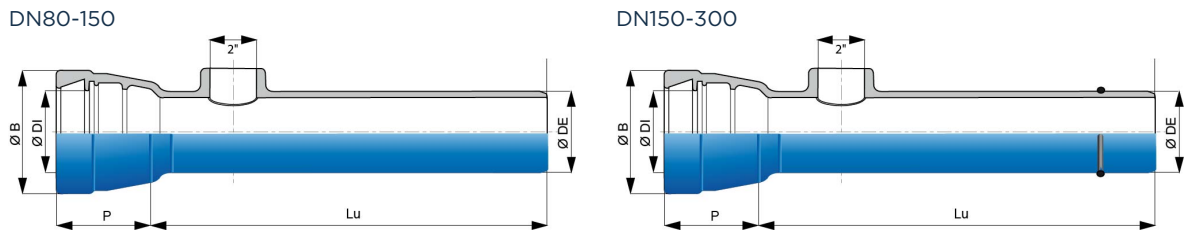

DN (mm)	Lu (mm)	ØDE (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
80	500	97.4	137.2	101.5	160.6	14.00	AKA80EUBOTT
100	500	117.3	143.3	121.5	177	16.30	AKB10EUBOTT
125	500	143.3	142.7	147.5	201.4	20.00	AKB12EUBOTT
150	500	169.2	148	173.5	230	25.40	AKB15EUBOTT
150	500	169.2	148	173.5	230	25.80	AKB15EVBOTT
200	500	221.1	158	225.8	290	37.50	AKB20EVBOTT

\* DN150 to 300 with weld bead


### Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures


### Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531


## Linked products

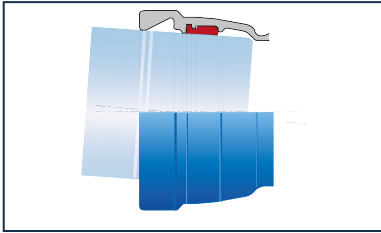

Kit ALPINAL Universal  
Tyton Fitting PCB +  
Universal Tyton Joint

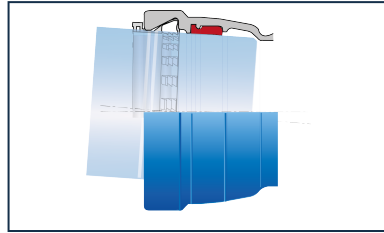

Kit ALPINAL Universal  
Tyton Fitting PCB +  
Universal Tyton Vi Joint

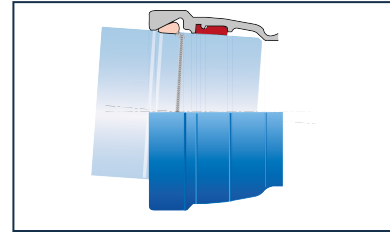

Kit ALPINAL Universal  
Tyton Fitting PCB +  
Universal Tyton Ve Joint

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*