


### Taper INTEGRAL with 2 sockets STANDARD

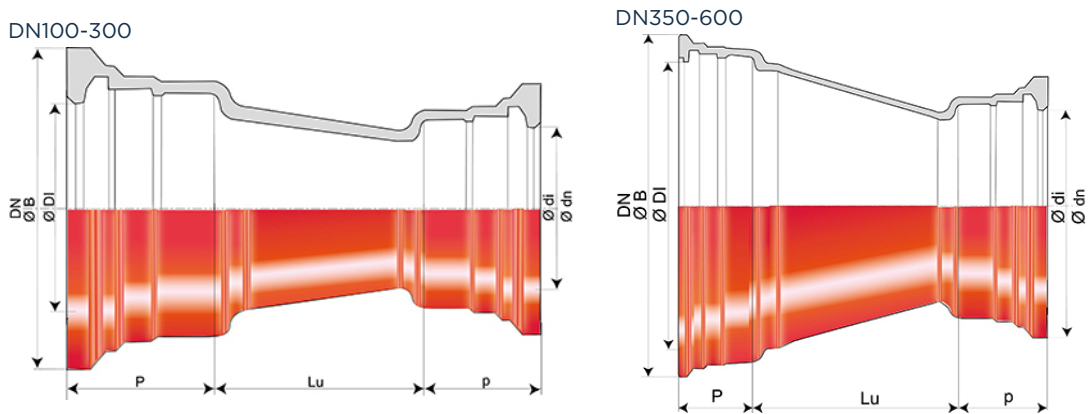

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
100	80	104.5	88	121	187.5	85	101	7.50	TSB10VE0E
150	100	130	94	173	241	88	121	11.10	TSB15VE0F
200	150	125	100	225	294	94	173	16.70	TSB20VE0J
300	250	123	110	329	408	105	277	36.00	TSB30VE0L
400	300	260	112	432.4	515.3	110	329	60.00	TSB40VE0M
600	500	258	132.5	638.6	737	117.5	535.5	120.00	TSB60VE0Q

\* References TSB..VE0. are joint included.

### Field of use:


- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- For networks with rising main under pressure
- For effluents between pH1 and pH13

### Main characteristics:


- External and internal coating: red epoxy powder 250µm (PECR)
- Type of joint: Standard
- Standard Gasket in Nitrile
- EN 598 / CE Marking
- Declaration of performances [DoP-INTEGRAL005EN](#)
- Mark NF

- Designed according to the regulatory texts:
  - NF EN 476: general prescriptions for components used in the networks
  - NF EN 752: Conception of sewage projects
  - NF EN 1610: Reception of the works
  - CCTG: Fascicule 70 (sewage work)


## Linked products

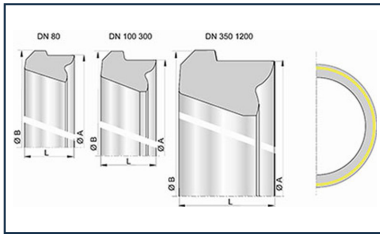

Nitrile STD Gasket  
DN80-2000

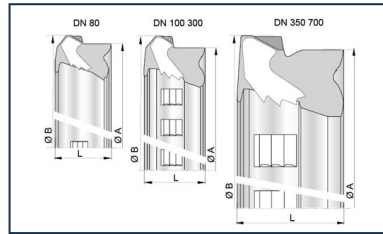

Gasket ViLoK® (NBR STD  
Vi) DN80-700

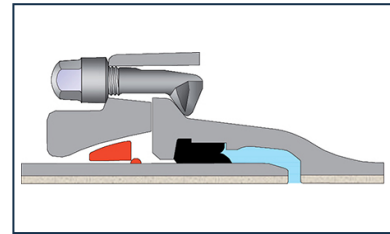

STD Ve joint for  
INTEGRAL STD Fittings

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*