


**Taper NATURAL with 2 sockets STANDARD**

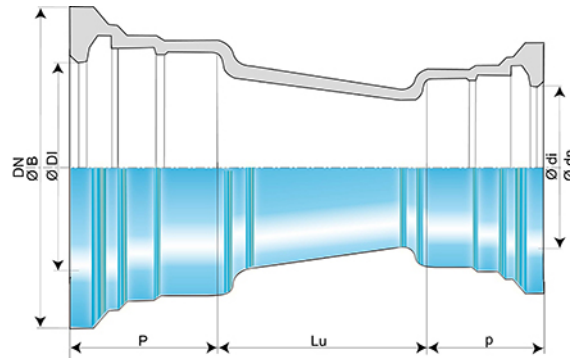

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
100	80	104.5	88	121.4	187.5	85	101.4	7.50	NSB10VE0ENN2
150	100	130	94	173.4	241	88	121.4	11.10	NSB15VE0FNN2
200	100	230	100	225.5	294	88	121.4	17.30	NSB20VE0FNN2
200	150	125	100	225.5	294	94	173.4	16.70	NSB20VE0JNN2
250	125	275	105	277.8	351	91	147.4	23.40	NSB25VE0GNN2
250	200	125	105	277.3	351	100	225.5	22.20	NSB25VE0KNN2
300	200	225	110	329.8	408.3	100	226.2	32.00	NSB30VE0KNN2
300	250	125	110	329.8	408.3	105	277.8	30.50	NSB30VE0LNN2


**Field of use:**

- For drinking water networks
- The scope of use of Aquacoat® fittings in soils is equivalent to that of Natural Biozinalium® pipes, it is suitable for the majority of soils, as defined in appendix D.2.2 of standard EN545:2010. exception :
  - peaty and acidic soils
  - soils containing waste, ashes, slag or contaminated by certain waste or industrial effluents
  - soils located below the level of the marine water table having a resistivity less than 500 Ω cm
- In such soils, or in other aggressive environments, or in the event of stray currents, it is recommended to use other, more suitable types of coatings.


## Main characteristics:

- Inside-Outside coating: Aquacoat fittings (AQB) without Bisphenol
- In conformity with EN 545:2010 and ISO 2531:2009


## Linked products

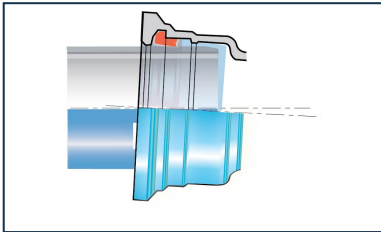

Kit Standard Taper AQB +  
Standard Gasket

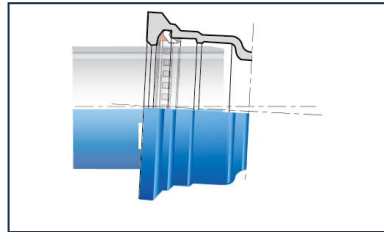

Kit Standard Fitting AQB  
+ Standard Vi Gasket

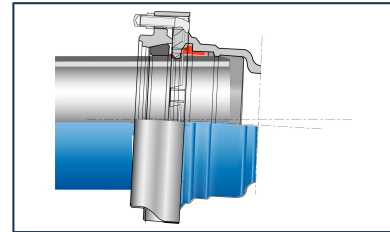

Kit Standard Fitting AQB  
+ Standard Ve Joint

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*