


## Tee (PECB) with 3 sockets UNIVERSAL STANDARD

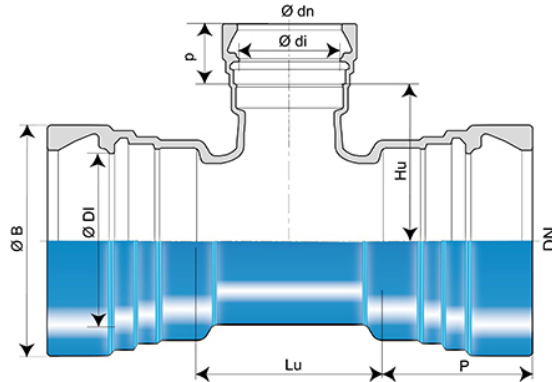

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Hu (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
100	100	190	142	121.4	177	95	142	121.4	24.20	SFB10TEOFTT
150	100	195	150	173.4	230	120	142	121.4	32.80	SFB15TEOFTT
150	150	255	150	173.4	230	125	150	173.4	38.20	SFB15TEOJTT
200	100	200	158	225.5	290	145	142	121.4	46.10	SFB20TEOFTT
250	250	375	166	276.8	347	190	166	276.8	78.00	SFB25TEOLT
300	100	205	178	328.8	406	195	142	121.4	79.00	SFB30TEOFTT
300	200	320	178	328.8	406	205	158	225.5	94.80	SFB30TEOKTT


### Field of use:

- To use under high to very high pressures


### Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

## Linked products

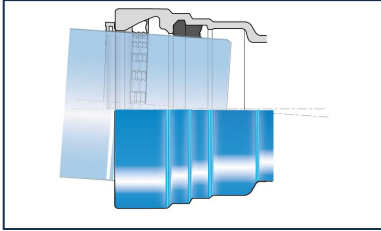

Kit Universal Standard  
Fitting PECB + Universal  
Standard Vi Joint

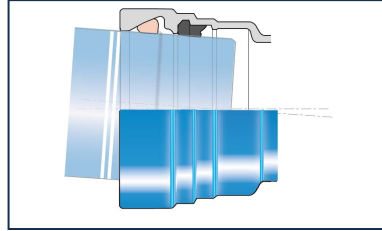

Kit Universal Standard  
Fitting PECB + Universal  
Standard Ve Joint

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*