


Tee PUR PUX with 2 sockets STANDARD and Fixed Flange branch

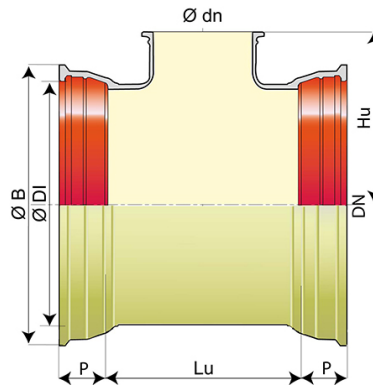

							PN 10	
DN (mm)	Ødn (mm)	Lu (mm)	Hu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
1400	800	1950	1010	255	1467	1600	2975.00	SFC14TD1TUU
1400	1000	1950	1040	255	1467	1600	2430.00	SSC14TD1VUU
1400	1400	1950	1100	255	1467	1600	2564.00	SSC14TD1CUU
1600	800	1505	1120	275	1673	1820	2390.00	SSC16TD1TUU
1600	1000	1505	1150	275	1673	1820	2282.00	SSC16TD1VUU
1600	1600	2170	1240	275	1673	1820	3769.00	SSC16TD1EUU


Field of use:

- Aggressive or soft waters
- For high corrosive soils, industrial pollution zones

Main characteristics:

- Internal-external coating: polyurethane coating in accordance with Standard EN 15655 (red epoxy coating inside the socket)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

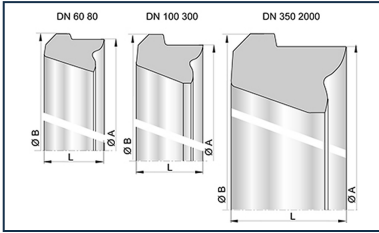

Standard gasket for Pipes
and Fittings DN60-2000

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.