


Tee PUR PUX with 2 sockets STANDARD and Rotatable Flange branch

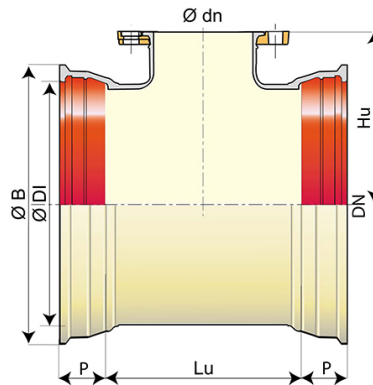

							PN 10	
DN (mm)	Ø dn (mm)	Lu (mm)	Hu (mm)	P (mm)	Ø DI (mm)	Ø B (mm)	Mass (kg)	References
1400	600	1010	980	255	1467	1600	1542.00	SSC14UD1RUU
1500	600	1110	980	280	1570	1742	1790.00	SSC15UD1RUU
1600	300	1050	1050	275	1673	1820	1972.00	SSC16UD1MUU
1600	400	1050	1100	275	1673	1820	1977.00	SSC16UV1NUU
1600	600	1050	1090	275	1673	1820	1997.00	SSC16UD1RUU
2000	600	1115	1315	290	2089	2269	3294.00	SSC20UD1RUU


Field of use:

- Aggressive or soft waters
- For high corrosive soils, industrial pollution zones

Main characteristics:

- Internal-external coating: polyurethane coating in accordance with Standard EN 15655 (red epoxy coating inside the socket)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

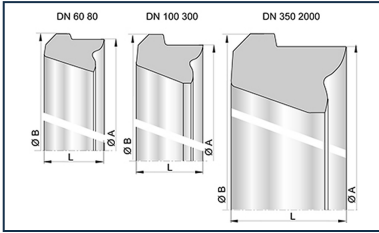

Standard gasket for Pipes
and Fittings DN60-2000

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.