


TYT Gasket for TYT Pipes and Fittings DN80-300

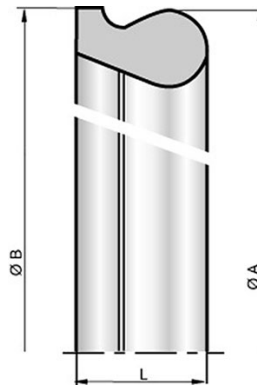

The TYTON gasket is a push-on joint. The watertightness is made by the compression of the elastomer gasket which operates during the assembling by the introduction of the spigot end inside the socket.

DN (mm)	L (mm)	ØA (mm)	ØB (mm)	Mass (kg)	References
80	26	124	126	0.12	JCA80BA
100	26	144	146	0.14	JCB10BA
125	26	171	173	0.17	JCB12BA
150	26	198	200	0.20	JCB15BA
200	30	254	256	0.34	JCB20BA
250	32	308	310	0.44	JCB25BA
300	34	364	366	0.61	JCB30BA

Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

Main characteristics:

- Elastomer quality : EPDM
- Quick and easy installation
- Possible axial play
- High coefficient security beyond the PFA
- High angular deflection possible

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.