


Wall Duct Gasket DN350-2000

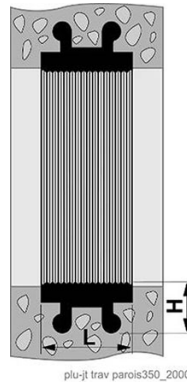

DN (mm)	Width L (mm)	Height H (mm)	Mass (kg)	References
350	50	27	1.00	PBB35T
450	50	27	1.20	PBB45T
500	50	27	1.40	PBB50T
700	50	27	1.70	PBB70T
800	50	27	1.80	PBB80T
900	50	27	2.00	PBB90T
1000	50	27	2.60	PBC10T
1100	50	27	3.25	PBC11T
1200	50	27	3.00	PBC12T
1500	50	27	3.40	PBC15T
1600	50	27	3.60	PBC16T
1800	50	27	3.90	PBC18T
2000	50	27	4.20	PBC20T

(*) consult us

Material and coating:

- Joint: SBR
- Supplied in red-brown polyethylene bags

Field of use:

- Separate sewer system
- Application: gravity flow
- Type of effluent: rainwater
- Perfectly watertight

Main characteristics:

- Joint in SBR
- Elastomer WC type according to EN 681-1
- Supplied in red-brown polyethylene bags

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.