


## Welded Double Flanged pipe PUR PUX

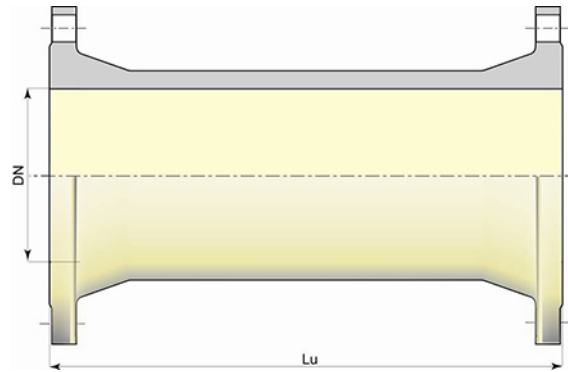

DN	Lu (mm)	PN 10		PN 16	
		Mass (kg)	References	Mass (kg)	References
1200	1000	1036	BBC12MA1CUU		
1200	2000	1766	BBC12MA1EUU		
1500	3000	3475	BBC15MA1GUU		
1600	1000	1580	BBC16MA1CUU		
1600	3000			3780	BBC16MA2GUU


### Field of use:

- Aggressive or soft waters
- For high corrosive soils, industrial pollution zones

### Main characteristics:

- Internal-external coating : polyurethane coating in accordance with Standard EN 15655
- In conformity with EN 545:2010 and ISO 2531:2009

## Linked products

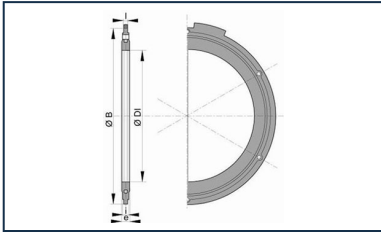

Flanged joint with hot  
galvanized steel bolts,  
nuts and washers

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*