


Connecting box AQUARING 360 - C250 - 40T - Square flanged frame for PVC pipes DN250 or DN350



AxB (mm)	C (mm)	O (mm)	H (mm)	h (mm)	F (mm)	Marking	Total Mass (kg)	Cover mass (kg)	Packaging	References
490x440	562	360	200	150	140	EU	27.00	11	20	CCAQ36TFEUS
490x440	562	360	200	150	140	EP	27.00	11	20	CCAQ36TFEUP
490x440	562	360	200	150	140	Standard	27.00	11	20	CCAQ36TF

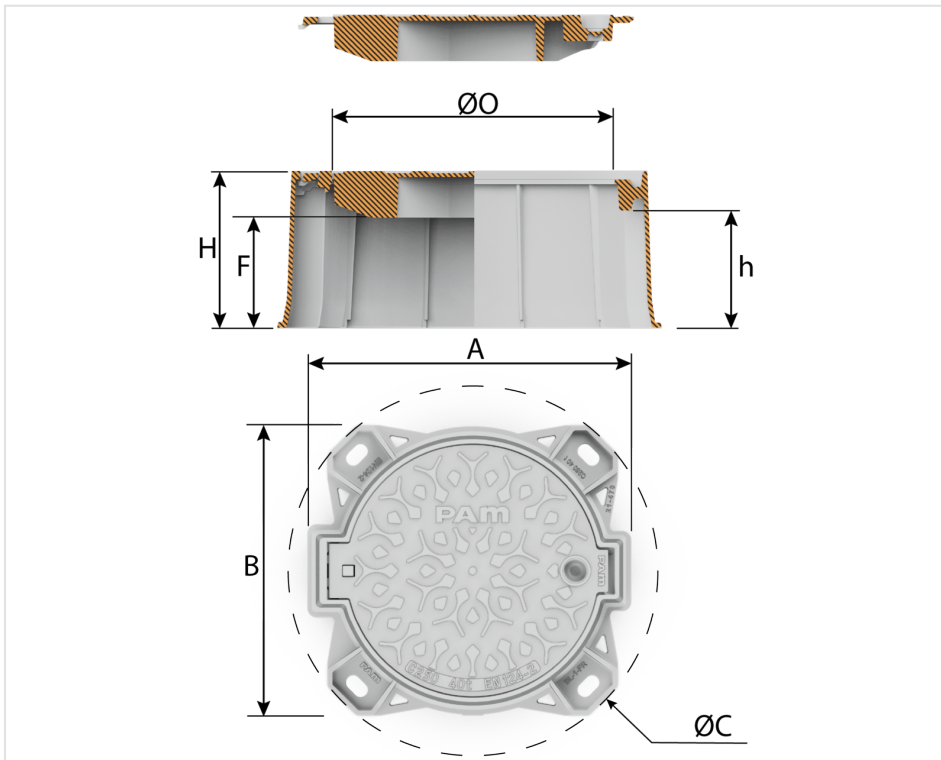

Material and coating:

- Frame and cover in Ductile Iron EN GJS 400-15: water base coating

Field of application:

- C250 class (Group 3) according to standard EN 124-2, intended for the circulated pavements and similar locations subjected to the passage of vehicles.
- The cover's resistance has been increased to 40 tons load.

Origine France Garantie

- This product is made in France in our foundry in Blénod-les-Pont-A-Mousson (54), and is certified Origine France Garantie. This guarantees consumers that the product is made in France in accordance with specifications available on originefrancegarantie.fr. The certification number is: BVCert 6026906.
- *"Origine France Garantie certification is awarded by an independent certification body. Checks are then carried out every year to ensure that the product is indeed 100% made in France and that at least 50% of the product's manufacturing costs (including raw materials) are of French origin".*

Main features:



Continuous hinge view, avoid debris intrusion


- Hinged round cover with continuous hinge, preventing gravel intrusion (see Hinge view).
- Secure cover closing at 90°.
- Those manholes are installed without gaskets on their pipe connection, to cover all types of DN250 or DN315 pipes.
- Large 360 mm diameter frame opening for pipe sealing plugs.
- Cover can be locked for intrusion or theft prevention with kit **C123**.
- Stable bedding thanks to a wide square seating.
- Compatible with the **INSTALL PLUS** bedding solution.

Locking Option:



The Height Adjustable AQUARING 360 can be optionally equipped with a locking bar. A special key with a unique fingerprint restricts access to authorized staff only.

Installation conditions:

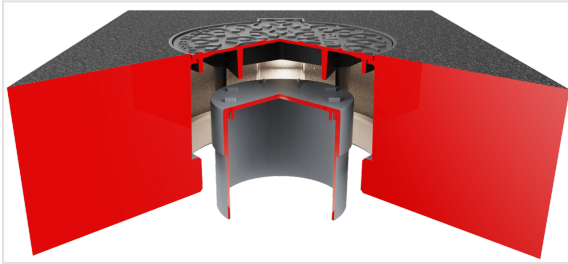

- Installs over a DN315 mm or DN250 mm PVC pipe without any contact with it.
- Leave the pipe sufficiently above ground level to limit the displacement of bedding materials during frame installation.
- Align the frame with ground level (0).

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.