


## Bend 11°15 (1/32) INTEGRAL with 2 sockets UNIVERSAL STANDARD

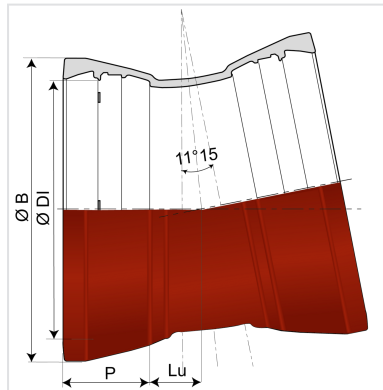

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
11°15	600	85	209	638	742	191.00	SFB60CE00FF
11°15	700	87	256	740.5	857	350.00	SFB70CE00FF
11°15	800	90	261	845.8	983.8	470.00	SFB80CE00FF
11°15	900	120	275	948.9	1093	696.00	SFB90CE00FF
11°15	1000	130	272.5	1052	1216	800.00	SFC10CE00FF
11°15	1200	150	279.5	1260	1419.6	950.00	SFC12CE00FF
11°15	1400	143	330	1468.5	1650.1	1382.00	SFC14CE00FF

### Field of use:


- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- For networks with rising main under pressure
- For effluents between pH1 and pH13

### Main characteristics:


- External and internal coating: red epoxy powder 250µm (PECR)
- Type of joint: Standard
- Standard Gasket in Nitrile
- EN 598 / CE Marking
- Declaration of performances [DoP-INTEGRAL005EN](#)
- Mark NF

- Designed according to the regulatory texts:
  - NF EN 476: general prescriptions for components used in the networks
  - NF EN 752: Conception of sewage projects
  - NF EN 1610: Reception of the works
  - CCTG: Fascicule 70 (sewage work)

## Linked products

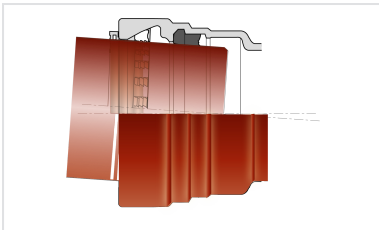

Kit Universal Standard  
Fitting PECR + Universal  
Standard Vi Joint

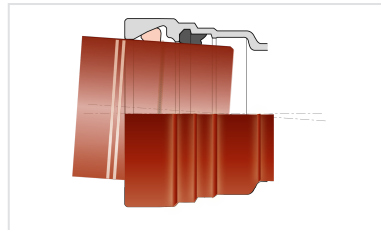

Kit Universal Standard  
Fitting PECR + Universal  
Standard Ve Joint

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*