


Bend 22°30 (1/16) INTEGRAL with 2 sockets UNIVERSAL STANDARD

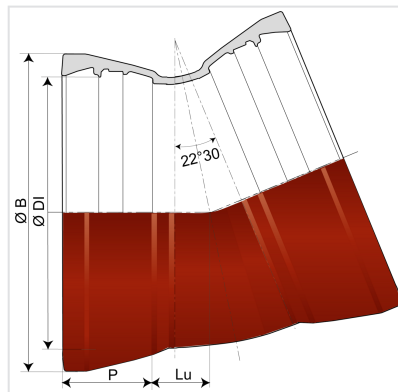

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	600	150	209	638	742	222.00	SFB60CD00FF
22°30	700	157.5	256	740.5	857	400.00	SFB70CD00FF
22°30	800	170	261	845.8	983.8	550.00	SFB80CD00FF
22°30	900	220	275	948.9	1093	770.00	SFB90CD00FF
22°30	1000	240	272.5	1052	1216	899.00	SFC10CD00FF
22°30	1200	285	279.5	1260	1419.6	1116.00	SFC12CD00FF
22°30	1400	264	330	1468.5	1650.1	1600.00	SFC14CD00FF

Field of use:


- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- For networks with rising main under pressure
- For effluents between pH1 and pH13

Main characteristics:


- External and internal coating: red epoxy powder 250µm (PECR)
- Type of joint: Standard
- Standard Gasket in Nitrile
- EN 598 / CE Marking
- Declaration of performances [DoP-INTEGRAL005EN](#)
- Mark NF

- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works
 - CCTG: Fascicule 70 (sewage work)

Linked products

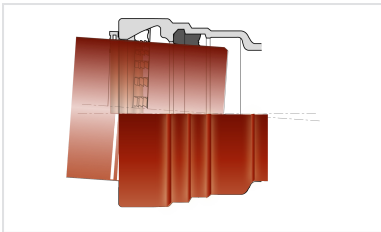

Kit Universal Standard
Fitting PECR + Universal
Standard Vi Joint

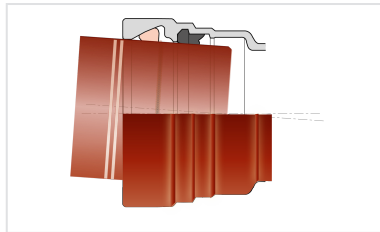

Kit Universal Standard
Fitting PECR + Universal
Standard Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.