


Bend 45° (1/8) INTEGRAL with 2 sockets UNIVERSAL STANDARD

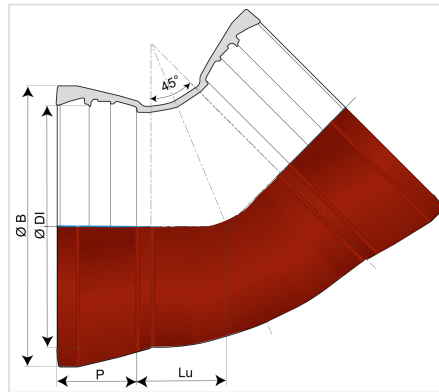

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
45°	600	285	209	638	742	284.00	SFB60CB00FF
45°	700	335.5	256	740.5	857	490.00	SFB70CB00FF
45°	800	364	261	845.8	983.8	700.00	SFB80CB00FF
45°	900	415	275	948.9	1093	916.00	SFB90CB00FF
45°	1000	460	272.5	1052	1216	1085.00	SFC10CB00FF
45°	1200	550	279.5	1260	1419.6	1487.00	SFC12CB00FF
45°	1400	522	330	1468.5	1650.1	2047.00	SFC14CB00FF
45°	1600	563	330	1674.2	1876	2990.00	SFC16CB00FF

Field of use:


- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- For networks with rising main under pressure
- For effluents between pH1 and pH13

Main characteristics:


- External and internal coating: red epoxy powder 250µm (PECR)
- Type of joint: Standard
- Standard Gasket in Nitrile
- EN 598 / CE Marking
- Declaration of performances [DoP-INTEGRAL005EN](#)
- Mark NF

- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works
 - CCTG: Fascicule 70 (sewage work)

Linked products

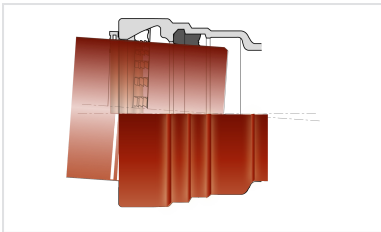

Kit Universal Standard
Fitting PECR + Universal
Standard Vi Joint

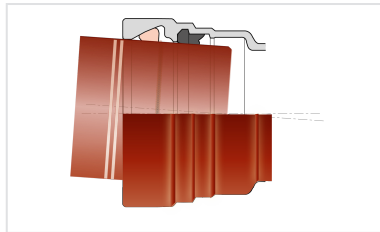

Kit Universal Standard
Fitting PECR + Universal
Standard Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.