


## Flange Socket INTEGRAL with socket UNIVERSAL STANDARD (Fixed Flange)

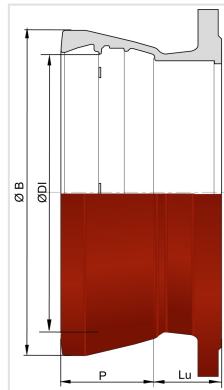

DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	PN 10		PN 16	
					Mass (kg)	References	Mass (kg)	References
700	190	256	740.5	857	251.00	SFB70BE10FF	259.00	SFB70BE20FF
800	200	261	845.8	983.8	330.00	SFB80BE10FF	385.00	SFB80BE20FF
900	210	275	948.9	1093	553.00	SFB90BE10FF	533.00	SFB90BE20FF
1000	220	272.5	1052	1216	533.00	SFC10BE10FF	550.00	SFC10BE20FF
1100	230	284	1157.1	1311.5	685.00	*	685.00	*
1200	240	279.5	1260	1419.6	679.00	SFC12BE10FF	720.00	SFC12BE20FF
1400	310	330	1468.5	1650.1	1069.00	*	1121.00	SFC14BE20FF
1600	330	330	1674.2	1876	1376.00	*	1439.00	SFC16BE20FF

(\*) please contact us


### Field of use:

- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- For networks with rising main under pressure
- For effluents between pH1 and pH13


## Main characteristics:

- External and internal coating: red epoxy powder 250µm (PECR)
- Type of joint: Standard
- Standard Gasket in Nitrile
- EN 598 / CE Marking
- Declaration of performances [DoP-INTEGRAL005EN](#)
- Mark NF
- Designed according to the regulatory texts:
  - NF EN 476: general prescriptions for components used in the networks
  - NF EN 752: Conception of sewage projects
  - NF EN 1610: Reception of the works
  - CCTG: Fascicule 70 (sewage work)

## Linked products

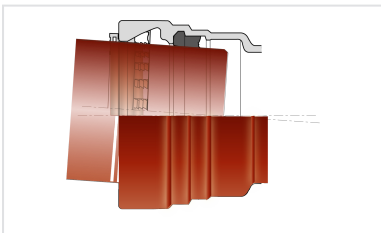

Kit Universal Standard  
Fitting PECR + Universal  
Standard Vi Joint

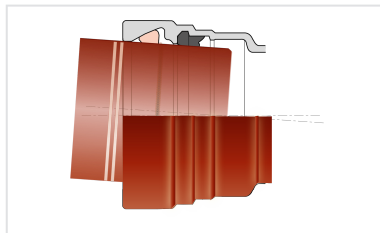

Kit Universal Standard  
Fitting PECR + Universal  
Standard Ve Joint

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*