


Tee INTEGRAL with 2 sockets UNIVERSAL STANDARD (Rotatable Flange)

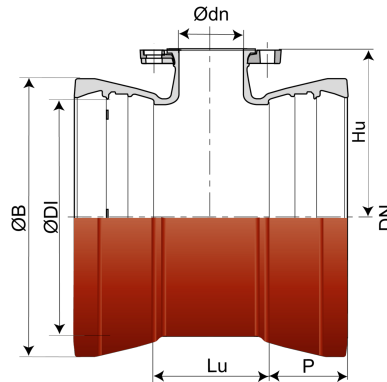

DN (mm)	Ødn (mm)	Lu (mm)	Hu (mm)	P (mm)	ØDI (mm)	ØB (mm)	PN 10		PN 16	
							Mass (kg)	References	Mass (kg)	References
600	100	340	480	209	638	742	227.80	SFB60UD1FFF	227.80	SFB60UD1FFF
700	200	365	525	256	740.5	857			428.10	SFB70UD2KFF
700	300	585	530	256	740.5	857	511.00	SFB70UD1MFF	510.00	SFB70UD2MFF
800	200	355	585	261	845.8	983.8	537.00	SFB80UD1KFF		
800	600	1015	645.8	261	845.8	983.8			878.00	SFB80UD2RFF
900	600	1145	705	275	948.9	1093			1205.00	SFB90UD2RFF
1000	600	1265	765	272.5	1052	1216			1447.00	SFC10UD2RFF
1200	250	822.5	873	279.5	1260	1419.6			1510.00	SFC12UD2RFF
1400	600	1010	980	330	1468.5	1650.1			2131.00	SFC14UD2RFF


Field of use:

- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- For networks with rising main under pressure
- For effluents between pH1 and pH13


Main characteristics:

- External and internal coating: red epoxy powder 250µm (PECR)
- Type of joint: Standard
- Standard Gasket in Nitrile
- EN 598 / CE Marking
- Declaration of performances [DoP-INTEGRAL005EN](#)
- Mark NF
- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works
 - CCTG: Fascicule 70 (sewage work)

Linked products

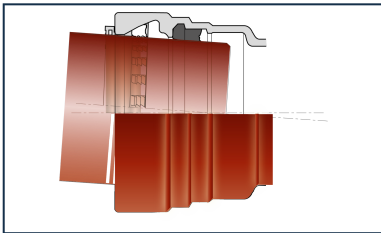

Kit Universal Standard
Fitting PECR + Universal
Standard Vi Joint

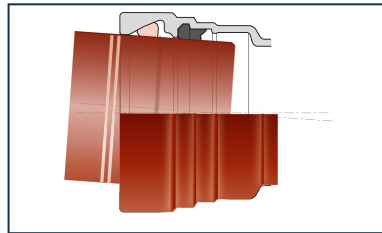

Kit Universal Standard
Fitting PECR + Universal
Standard Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.