


Standard gasket for Pipes and Fittings DN60-2000

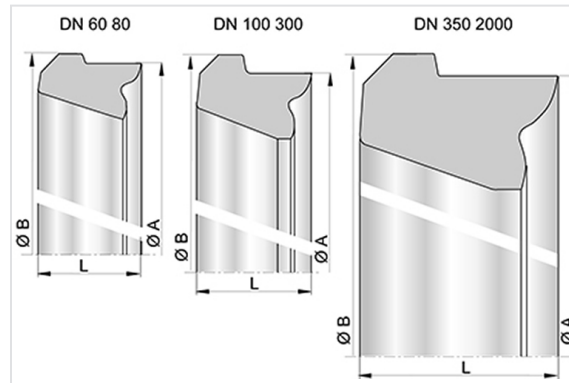

The STANDARD gasket is compatible with the whole STANDARD sockets for pipes and fittings from water and irrigation ranges.

The STANDARD gasket is a push-on joint. The watertightness is made by the compression of the elastomer gasket which operates during the assembling by the introduction of the spigot end inside the socket.

| DN (mm) | L (mm) | ØA (mm) | ØB (mm) | Mass (kg) | References |
|---------|--------|---------|---------|-----------|------------|
| 60 | 28.7 | 105.6 | 110.6 | 0.11 | JSA60BA |
| 80 | 29.8 | 127.5 | 135.7 | 0.15 | JSA80BA |
| 100 | 29.8 | 148.6 | 158.6 | 0.20 | JSB10BA |
| 125 | 30.6 | 175.7 | 185.7 | 0.24 | JSB12BA |
| 150 | 30.6 | 202.1 | 212.1 | 0.29 | JSB15BA |
| 200 | 31.7 | 250.5 | 260.5 | 0.38 | JSB20BA |
| 250 | 32.6 | 303.5 | 313.5 | 0.50 | JSB25BA |
| 300 | 35.9 | 359.5 | 369.5 | 0.71 | JSB30BA |
| 350 | 37.8 | 414 | 422 | 0.90 | JSB35BA |
| 400 | 38.8 | 466.5 | 474.5 | 1.08 | JSB40BA |
| 450 | 40.7 | 519.8 | 527.8 | 1.32 | JSB45BA |
| 500 | 41.8 | 573.4 | 581.4 | 1.54 | JSB50BA |
| 600 | 45 | 680.2 | 690.2 | 2.16 | JSB60BA |
| 700 | 48.2 | 787.6 | 797.6 | 2.87 | JSB70BA |
| 800 | 51.4 | 895.4 | 905.4 | 3.67 | JSB80BA |
| 900 | 54.6 | 1002.3 | 1012.3 | 4.61 | JSB90BA |
| 1000 | 57.8 | 1109.1 | 1119.1 | 5.59 | JSC10BA |
| 1100 | 65.1 | 1218.5 | 1229.5 | 7.68 | JSC11BA |

| DN (mm) | L (mm) | ØA (mm) | ØB (mm) | Mass (kg) | References |
|---------|--------|---------|---------|-----------|------------|
| 1200 | 68.2 | 1326.2 | 1338.2 | 9.34 | JSC12BA |
| 1400 | 81.6 | 1546.4 | 1554.9 | 15.49 | JSC14BA |
| 1500 | 89.2 | 1656.6 | 1675.6 | 19.77 | JSC15BA |
| 1600 | 89.2 | 1761.4 | 1780.4 | 21.05 | JSC16BA |
| 1800 | 96.6 | 1977 | 1998 | 27.72 | JSC18BA |
| 2000 | 104.6 | 2204.8 | 2226.8 | 29.00 | JSC20BA |

Field of use:

- For drinking water networks

Main characteristics:

- Elastomer quality : EPDM
- Quick and easy installation
- Possible axial play
- High coefficient security beyond the PFA
- High angular deflection possible

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.