


## ZMU pipes DN350 to 1200 with STANDARD socket

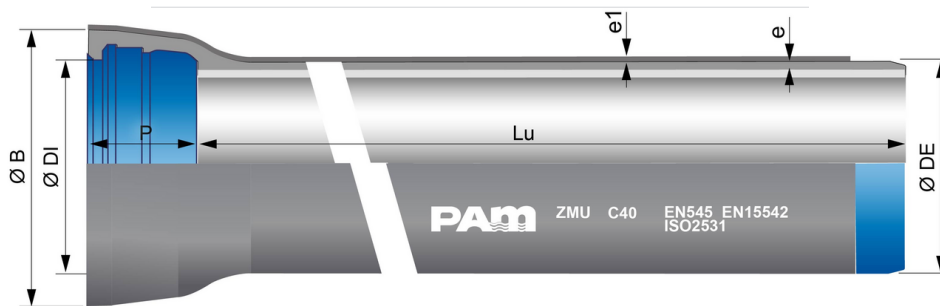

DN	Lu (m)	Class	e (mm)	e1 (mm)	ØDE (mm)	ØDI (mm)	P (mm)	ØB (mm)	Mass (kg/m)	References
350	6.00	C40	7.1	5	378	380.9	110.5	444.5	86.40	209891
400	6.00	C40	7.8	5	429	431.9	112.5	494.6	104.80	209675
500	6.00	C40	9.3	5	532	535	117.5	600.9	148.30	184689
600	6.00	C40	10.9	5	635	638.1	132.5	712	200.40	184622
700	6.96	C25	8.8	5	738	741.7	192	821.9	209.60	DSB70H70
800	6.95	C25	9.6	5	842	845.8	197	935.6	255.80	DSB80H70
900	6.95	C25	10.6	5	945	948.9	200	1043.4	309.20	DSB90H70
1000	6.96	C25	11.6	5	1048	1052	203	1152.4	367.40	DSC10H70
1200	6.93	C25	13.6	5	1255	1260	235	1373.7	507.70	DSC12H70

### Legend:

- DN: nominal diameter
- Lu: laying length, in m
- Class: pressure class according to EN 545 and ISO 2531
- e: nominal thickness according to ISO 2531, in mm
- e1: external thickness of ZMU coating, in mm (cement mortar with acrylic fibers and resin) according to EN15542
- ØDE: external nominal diameter of the barrel according to EN 545 and ISO 2531, in mm
- ØDI: internal nominal diameter of the socket, in mm
- P: nominal depth of the socket, in mm
- ØB: nominal diameter of the socket, in mm
- Mass: total mass per metre (including cement coating and socket), determined with the nominal thickness, in kg/m
- Reference: commercial reference Saint-Gobain PAM


### Field of use:

- For drinking water supply networks

### Main characteristics:

- Joint in alimentary elastomer EPDM (ACS, KTW, WRAS,...)
- External coating: a layer of zinc-aluminium 85/15 alloy, enriched with copper, with a minimum surface density of 400g/m<sup>2</sup>, applied by spraying molten metal onto the surface of the iron, using an electric arc spray gun, from ZnAl (Cu) alloy wire + a protective layer of Aquacoat (semi-permeable), a water-based blue acrylic of average thickness 80 microns applied using a spray gun + cement mortar ZMU with polymeric additiv and reinforced with PE fibers
- Internal coating: sulfate resisting blast furnace cement mortar
- ZMU pipes are in conformity with EN 545
- ZMU coating in conformity with EN 15542

### Type of soils:

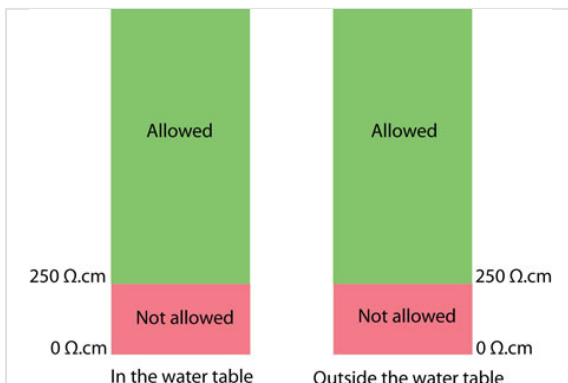

ZMU coating can be in contact with nearly all types of soil. Please consider the following matrix based upon resistivity of soils. In case of doubt, please advise.

### Type of water:


Ductile iron pipes with internal coating of sulphate resisting blast furnace cement mortar (SRC) are adapted to convey all types of drinking water in conformity with Directive EU 2020/2184.

In case of other type of water, please refer to below information to check the compatibility with cement mortar.

	Minimum value	Maximum value			
Parameter	pH	CO2 aggressive	Sulphate	Magnesium	Ammonium
Unit	-	mg/l	mg/l	mg/l	mg/l
Value	5,5	15	3000	500	30

Other cement lining also available on request.


**Linked products**

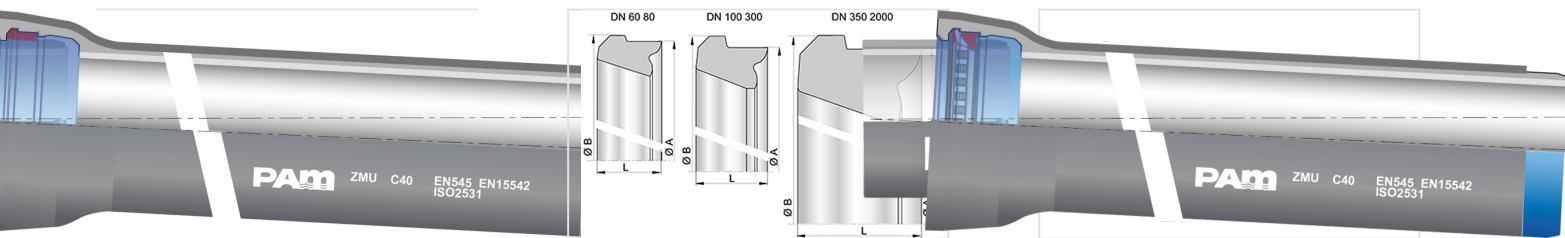

Kit Standard ZMU Pipe + Standard Gasket

Standard gasket for Pipes and Fittings DN60-2000

Kit Standard ZMU Pipe + Standard Vi Gasket

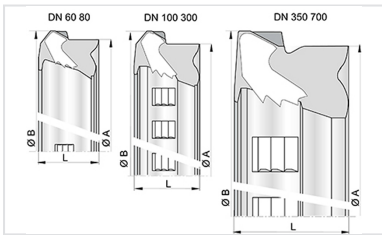

STD Vi gasket for Pipes and Fittings DN60-700



Lubricating paste - BLUPAM



Lubricating paste - NATURAL, INTEGRAL, and PLUVIAL ranges

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*