


## Bend 90° (1/4) (PECB) with 2 sockets TYTON DN80-300

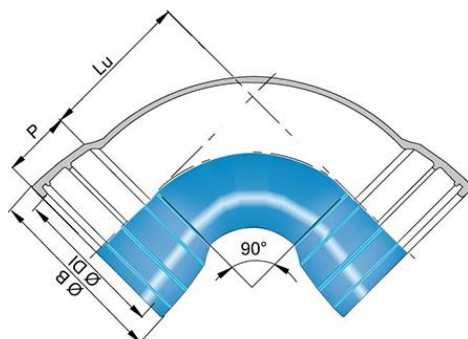

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
90°	80	100	84	100,5	141	8,00	103039
90°	100	125	88	120,5	161	10,00	SYB10CA00TT
90°	125	150	91	146,5	188	14,50	103175
90°	150	175	94	172,5	215	19,00	SYB15CA00TT
90°	200	225	100	224,5	271	30,50	SYB20CA00TT
90°	250	280	105	276,5	324	45,50	103035
90°	300	330	110	328,5	381	63,50	103542

### Field of use:

- For drinking water and irrigation networks
- For aggressive soils (maritime soils, peaty, ...)

### Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009